




Bearing No. FYTWR 25 YTHR

H	12.7 mm
B	34.1 mm
N	12.7 mm
T	36.5 mm
L	69.9 mm
d	25 mm
A	29.4 mm
J	98.8 mm
Housing	FYTWR 505 Y
Category	Bearings
Size (mm)	25x29.4x13.5
Inventory	0.0
Width (mm)	13,5
R ₁	18.2 mm
Product Group	M06110
A ₁	13.5 mm
A ₅	24.9 mm
B ₄	5 mm
A ₅	24.9 mm
B ₄	5 mm
R ₁	18.2 mm
S ₁	19.8 mm
A ₁	13.5 mm
S ₁	19.8 mm
R _G	1/4-28 UNF
D _{b2}	69.9 mm
D _{b1}	65.1 mm
R _?	45 °
Bearing number	FYTWR 25 YTHR

Limiting speed	4300 r/min
D _{b2}	69.9 mm
D _{b1}	65.1 mm
Housing material	Stainless steel
Manufacturer Name	SKF
Weight / Kilogram	0
Mass bearing unit	0.71 kg
Bore Diameter (mm)	25
Outer Diameter (mm)	29,4
R _?	45 °
Minimum Buy Quantity	N/A
Thread - G ₂	M6x0.75
R _G - 1/4-28 UNF	1/428 UNF
Basic dynamic load rating C	11.9 kN
Basic dynamic load rating - C	11.9 kN
Thread grub screw G ₂	M6x0.75
Fatigue load limit P _u	0.335 kN
Fatigue load limit - P _u	0.335 kN
Hexagonal key size for grub screw N	3 mm
Hexagonal key size for grub screw - H	3 mm
Basic static load rating C ₀	7.8 kN
Basic static load rating - C ₀	7.8 kN
Recommended tightening torque for grub screw	4 N·m
Recommended diameter for attachment bolts, mm G	10 mm

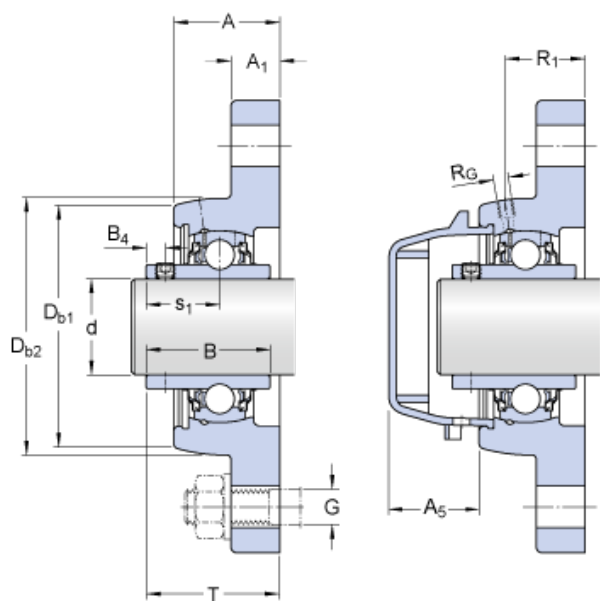

Recommended diameter for attachment bolts, inch G	0.4375 in
---	-----------