


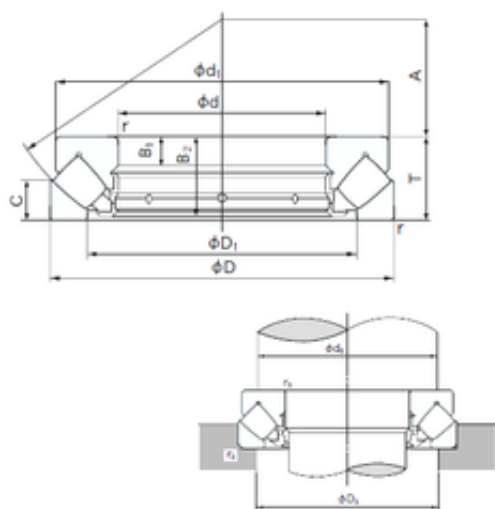

Bearing No. 29440E

C	59 mm
B	43 mm
d	200 mm
D	400 mm
T	122 mm
A	122 mm
B1	43 mm
D1	286 mm
d1	380 mm
B2	117 mm
Width	122 mm
r min.	5 mm
Weight	73 Kg
da min.	290 mm
Da max.	335 mm
ra max.	4 mm
da (min)	290 mm
Da (max)	335 mm
ra (max)	4 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	200 mm
Size (mm)	200x400x122
Width (mm)	122
Configuration	Single Row
Bearing number	29440E
Outside Diameter	400 mm
Static Load Rating	8,450,000 N
Bore Diameter (mm)	200
Dynamic Load Rating	2,350,000 N

Outer Diameter (mm)	400
Limiting Speed - Oil	740 rpm
Fillet Radius/Chamfer	5 mm
Basic dynamic load rating (C)	2350 kN
Basic static load rating (C0)	8450 kN