


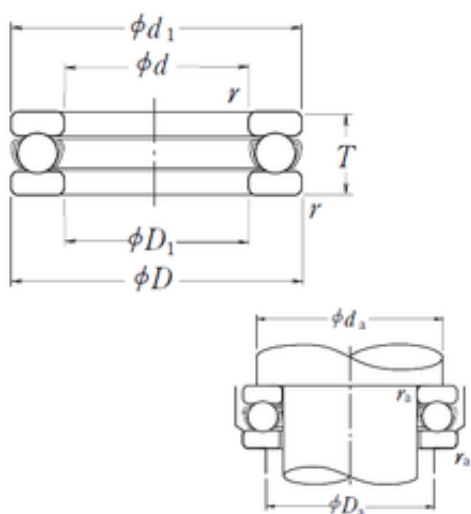

Bearing No. 51168X

C	375
r	2
d	340 mm
D	420 mm
T	64 mm
Z_	35
ra	2
D_	420
C0	1760
da	388
B_	64
D1	344 mm
d1	416 mm
T_	64
SRE	15.43
D_1	344
SRI	15.43
D_a	372
DA_	28.575
yobi	51168X
SREN	0
SRIN	0
SRIX	0.1
SDM_	380
mass	19.9
KBRG	511
SREX	0.1
Weight	19,9 Kg
r min.	2 mm
LangID	1

ra max.	2 mm
da min.	388 mm
Da max.	372 mm
Oil rpm	850
GRS rpm	560
hidYobi	51168X
hidTable	ecat_NSSDTB
Size (mm)	340x420x64
Prod_Type3	TB_SD_WFS
Width (mm)	64
Bearing number	51168X
Bore Diameter (mm)	340
Outer Diameter (mm)	420
(Grease) Lubrication Speed	560 r/min
Basic static load rating (C0)	1760 kN
Basic dynamic load rating (C)	375 kN