


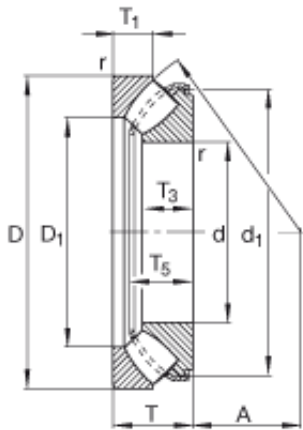

Bearing No. 29456-E1

	30 °
A	166 mm
m	126,3 kg / Weight
d	280 mm
D	520 mm
T	145 mm
Size (mm)	280x520x145
Width (mm)	145
C_a	5200000 N / Dynamic load rating (axial)
T_5	130,5 mm
d_1	473,1 mm
T_3	95 mm
D_1	372 mm
T_1	70 mm
n_G	1230 1/min / Limiting speed
n_B	620 1/min / Reference speed
C_{0a}	15800000 N / Static load rating (axial)
Bearing number	29456-E1
C_{ua}	1480000 N / Fatigue limit load, axial
r_{min}	6 mm
$r_{a \max}$	5 mm
$d_{b \max}$	320 mm
$D_{b \min}$	530 mm
$D_{a \max}$	446 mm
$d_{a \min}$	395 mm

d _{b1 max}	302 mm
Bore Diameter (mm)	280
Outer Diameter (mm)	520