


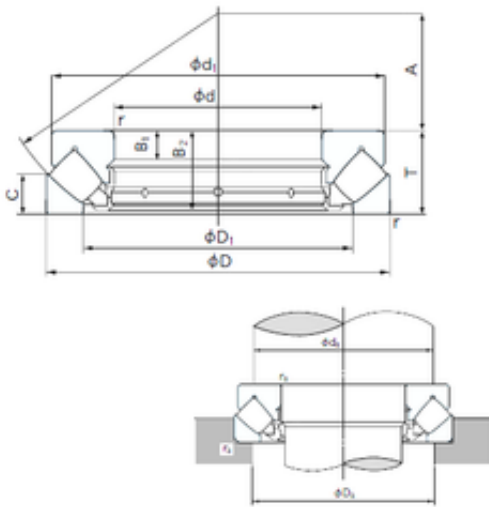

Bearing No. 29456E

C	68 mm
B	52 mm
d	280 mm
D	520 mm
T	145 mm
A	166 mm
B1	52 mm
D1	387 mm
d1	495 mm
B2	140 mm
Width	145 mm
r min.	6 mm
Weight	137 Kg
da min.	390 mm
Da max.	440 mm
ra max.	5 mm
da (min)	390 mm
Da (max)	440 mm
ra (max)	5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	280 mm
Size (mm)	280x520x145
Width (mm)	145
Configuration	Single Row
Bearing number	29456E
Outside Diameter	520 mm
Static Load Rating	13,500,000 N
Bore Diameter (mm)	280
Dynamic Load Rating	3,450,000 N

Outer Diameter (mm)	520
Limiting Speed - Oil	580 rpm
Fillet Radius/Chamfer	6 mm
Basic dynamic load rating (C)	3450 kN
Basic static load rating (C0)	13500 kN