


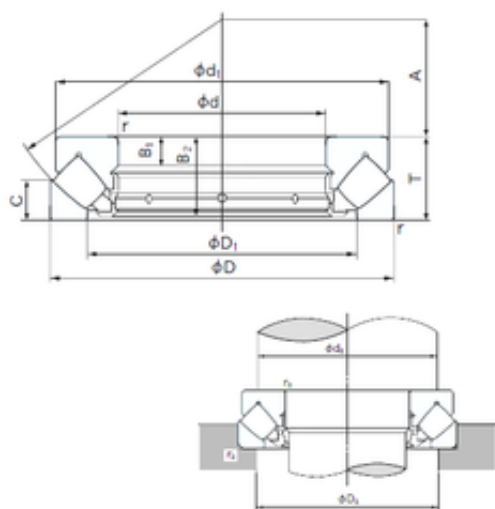

Bearing No. 29460E

C	70 mm
B	52 mm
d	300 mm
D	540 mm
T	145 mm
A	175 mm
B1	52 mm
D1	402 mm
d1	515 mm
B2	140 mm
Width	145 mm
r min.	6 mm
Weight	146 Kg
da min.	410 mm
Da max.	460 mm
ra max.	5 mm
da (min)	410 mm
Da (max)	460 mm
ra (max)	5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	300 mm
Size (mm)	300x540x145
Width (mm)	145
Configuration	Single Row
Bearing number	29460E
Outside Diameter	540 mm
Static Load Rating	14,800,000 N
Bore Diameter (mm)	300
Dynamic Load Rating	3,650,000 N

Outer Diameter (mm)	540
Limiting Speed - Oil	540 rpm
Fillet Radius/Chamfer	6 mm
Basic dynamic load rating (C)	3650 kN
Basic static load rating (C0)	14800 kN