


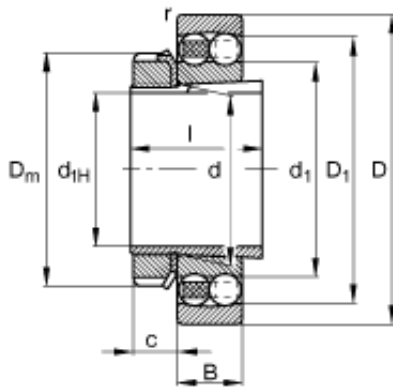

Bearing No. 2205-K-TVH-C3 + H305

	H305 / Adapter sleeve
d	25 mm
m	0,152 kg / Weight
e	0,35
D	52 mm
B	18 mm
l	29 mm
c	9 mm
Size (mm)	20x52x18
Width (mm)	18
m ₁	0,07 kg / Weight, adapter sleeve
Y ₁	1,78
d ₁	32,3 mm
Y ₂	2,75
D _m	38 mm
C _r	17300 N / Dynamic load rating (radial)
D ₁	44,7 mm
Y ₀	1,86
n _G	15000 1/min / Limiting speed
n _B	14900 1/min / Reference speed
C _{0r}	4400 N / Static load rating (radial)
Bearing number	2205-K-TVH-C3 + H305
C _{ur}	275 N / Fatigue limit load, radial
d _{1H}	20 mm
r _{a max}	1 mm

$d_{b \text{ min}}$	28 mm
$D_{a \text{ max}}$	46,4 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	30,6 mm
Bore Diameter (mm)	20
Outer Diameter (mm)	52