


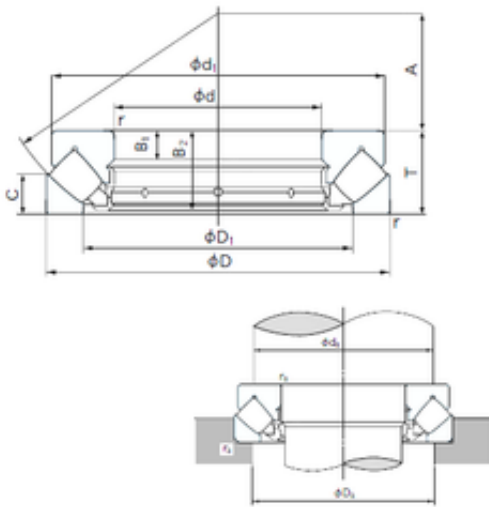

**Bearing No. 29464E**

|                     |                  |
|---------------------|------------------|
| C                   | 75 mm            |
| B                   | 55 mm            |
| d                   | 320 mm           |
| D                   | 580 mm           |
| T                   | 155 mm           |
| A                   | 191 mm           |
| B1                  | 55 mm            |
| D1                  | 435 mm           |
| d1                  | 555 mm           |
| B2                  | 149 mm           |
| Width               | 155 mm           |
| r min.              | 7.5 mm           |
| Weight              | 179 Kg           |
| da min.             | 435 mm           |
| Da max.             | 495 mm           |
| ra max.             | 6 mm             |
| da (min)            | 435 mm           |
| Da (max)            | 495 mm           |
| ra (max)            | 6 mm             |
| Bore Type           | Cylindrical Bore |
| Enclosure           | Open             |
| Bore Size           | 320 mm           |
| Size (mm)           | 320x580x155      |
| Width (mm)          | 155              |
| Configuration       | Single Row       |
| Bearing number      | 29464E           |
| Outside Diameter    | 580 mm           |
| Static Load Rating  | 16,800,000 N     |
| Bore Diameter (mm)  | 320              |
| Dynamic Load Rating | 4,050,000 N      |
|                     |                  |

|                               |          |
|-------------------------------|----------|
| Outer Diameter (mm)           | 580      |
| Limiting Speed - Oil          | 480 rpm  |
| Fillet Radius/Chamfer         | 7.5 mm   |
| Basic dynamic load rating (C) | 4050 kN  |
| Basic static load rating (C0) | 16800 kN |