


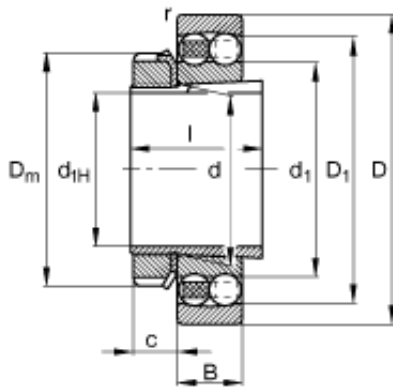

Bearing No. 2206-K-TVH-C3 + H306

	H306 / Adapter sleeve
d	30 mm
m	0,246 kg / Weight
e	0,3
D	62 mm
B	20 mm
l	31 mm
c	9 mm
Size (mm)	25x62x20
Width (mm)	20
m_1	0,11 kg / Weight, adapter sleeve
Y_1	2,13
d_1	38,5 mm
Y_2	3,29
D_m	45 mm
C_r	26000 N / Dynamic load rating (radial)
D_1	54 mm
Y_0	2,23
n_G	12000 1/min / Limiting speed
n_B	12700 1/min / Reference speed
C_{0r}	6900 N / Static load rating (radial)
Bearing number	2206-K-TVH-C3 + H306
C_{ur}	430 N / Fatigue limit load, radial
d_{1H}	25 mm
$r_{a \max}$	1 mm

$d_{b \text{ min}}$	33 mm
$D_{a \text{ max}}$	56,4 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	35,6 mm
Bore Diameter (mm)	25
Outer Diameter (mm)	62