


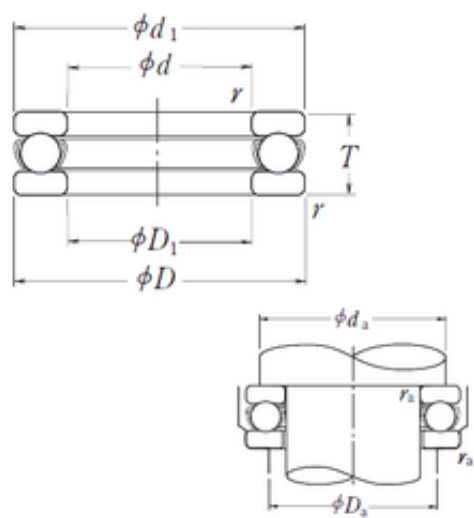

Bearing No. 51200

r	0.6
C	12.8
d	10 mm
D	26 mm
T	11 mm
C0	17.1
Z_	9
B_	11
da	20
D1	12 mm
ra	0.6
D_	26
d1	26 mm
T_	11
DA_	5.556
D_1	12
SRI	3
D_a	16
SRE	3
SREX	0.03
KBRG	5111
mass	0.028
SRIX	0.03
SRIN	0
SREN	0
yobi	51200
SDM_	18
Noun	Bearing
UNSPSC	31171552
LangID	1

Bore 2	0.472 Inch 12 Millimeter
Bore 1	0.394 Inch 10 Millimeter
Height	0.433 Inch 11 Millimeter
Banded	No
r min.	0,6 mm
Weight	0,028 Kg
hidYobi	51200
GRS rpm	6000
da min.	20 mm
Da max.	16 mm
ra max.	0,6 mm
series:	51200
Oil rpm	9000
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	10x26x11
race type:	Flat
Width (mm)	11
Prod_Type3	TB_SD_WFS
maximum rpm:	9000 rpm
Weight / LBS	0.06173
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
cage material:	Steel Cage
overall width:	11 mm
Other Features	Single Row With Flat Seat
Keyword String	Ball Thrust

Thrust Bearing	Yes
bore diameter:	10 mm
Bearing number	51200
fillet radius:	.6 mm
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	10MM Bore 1; 12MM Bore 2; 26MM Outside Diameter; 11MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	1.024 Inch 26 Millimeter
precision rating:	ABEC1, P0
Weight / Kilogram	0.03
Manufacturer Name	NSK
outside diameter:	26 mm
Bore Diameter (mm)	10
Outer Diameter (mm)	26
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
static load capacity:	3850 lbf
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
dynamic load capacity:	2870 lbf
Manufacturer Item Number	51200
outside diameter design:	Straight
Single or Double Direction	Single Direction

(Grease) Lubrication Speed	6000 r/min
operating temperature range:	Maximum of +120 °C
Basic static load rating (C0)	17,1 kN
Basic dynamic load rating (C)	12,8 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter