


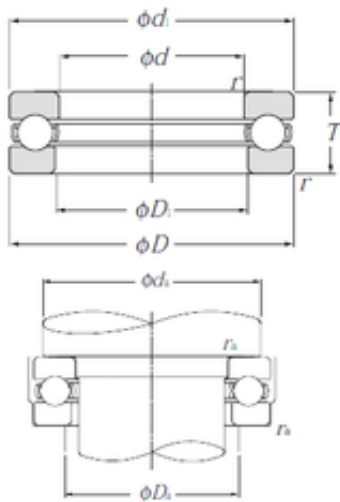

Bearing No. 51200

D	26 mm
d	10 mm
T	11 mm
d1	26 mm
D1	12 mm
Noun	Bearing
Bore 1	0.394 Inch 10 Millimeter
Weight	0,03 Kg
Bore 2	0.472 Inch 12 Millimeter
UNSPSC	31171552
Banded	No
r min.	0,6 mm
Height	0.433 Inch 11 Millimeter
da min.	20 mm
ra max.	0,6 mm
Da max.	16 mm
series:	512
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	10x26x11
Width (mm)	11
Weight / LBS	0.06614
maximum rpm:	8300 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	10 mm
overall width:	11 mm

Keyword String	Ball Thrust
cage material:	Resin
fillet radius:	0.6 mm
Bearing number	51200
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	10MM Bore 1; 12MM Bore 2; 26MM Outside Diameter; 11MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	1.024 Inch 26 Millimeter
outside diameter:	26 mm
Manufacturer Name	NTN
Weight / Kilogram	0.03
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Bore Diameter (mm)	10
Outer Diameter (mm)	26
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
Component Description	Roller Assembly Plus Raceways
static load capacity:	17100 N
dynamic load capacity:	12700 N
Harmonized Tariff Code	8482.10.50.08

Manufacturer Item Number	51200
outside diameter design:	Straight
(Grease) Lubrication Speed	5 800 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	17,1 kN
Basic dynamic load rating (C)	12,7 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter