


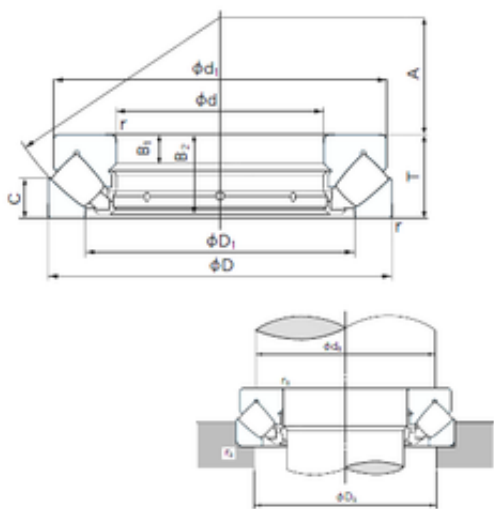

Bearing No. 29492E

C	100 mm
B	74 mm
d	460 mm
D	800 mm
T	206 mm
A	272 mm
B1	74 mm
D1	608 mm
d1	765 mm
B2	199 mm
Width	206 mm
r min.	9.5 mm
Weight	435 Kg
da min.	615 mm
Da max.	690 mm
ra max.	8 mm
da (min)	615 mm
Da (max)	690 mm
ra (max)	8 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	460 mm
Size (mm)	460x800x206
Width (mm)	206
Configuration	Single Row
Bearing number	29492E
Outside Diameter	800 mm
Static Load Rating	31,500,000 N
Bore Diameter (mm)	460
Dynamic Load Rating	7,150,000 N

Outer Diameter (mm)	800
Limiting Speed - Oil	290 rpm
Fillet Radius/Chamfer	9.5 mm
Basic dynamic load rating (C)	7150 kN
Basic static load rating (C0)	31500 kN