


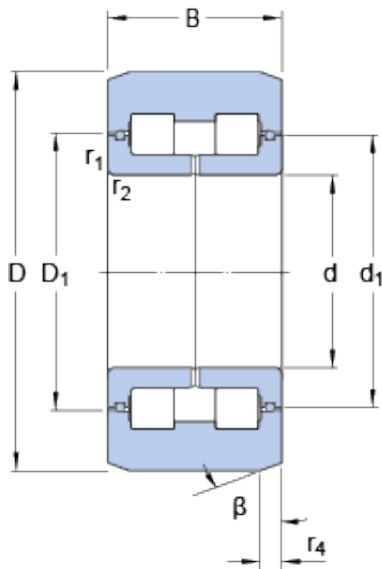

Bearing No. 319008 A/HB2

|                                               |              |
|-----------------------------------------------|--------------|
| D                                             | 210 mm       |
| d                                             | 110 mm       |
| B                                             | 110 mm       |
| ?                                             | 15 °         |
| ?                                             | 15 °         |
| Size (mm)                                     | 210x110x110  |
| Width (mm)                                    | 110          |
| d <sub>1</sub>                                | 157.15 mm    |
| D <sub>1</sub>                                | 158 mm       |
| Bearing number                                | 319008 A/HB2 |
| Mass roller unit                              | 19.4 kg      |
| Bore Diameter (mm)                            | 210          |
| Outer Diameter (mm)                           | 110          |
| r <sub>1,2</sub> min.                         | 2 mm         |
| r <sub>3,4</sub> min.                         | 10 mm        |
| d <sub>1</sub> ?                              | 157.15 mm    |
| D <sub>1</sub> ?                              | 158 mm       |
| r <sub>1,2</sub> - min.                       | 2 mm         |
| r <sub>3,4</sub> - min.                       | 10 mm        |
| Basic dynamic load rating C                   | 286 kN       |
| Basic dynamic load rating - C                 | 286 kN       |
| Fatigue load limit P <sub>u</sub>             | 40.5 kN      |
| Fatigue load limit - P <sub>u</sub>           | 40.5 kN      |
| Basic static load rating C <sub>0</sub>       | 360 kN       |
| Basic static load rating - C <sub>0</sub>     | 360 kN       |
| Maximum static radial loads - F <sub>0r</sub> | max. 380 kN  |

|                                           |             |
|-------------------------------------------|-------------|
| Maximum dynamic radial loads - $F_r$      | max. 265 kN |
| Maximum dynamic radial loads $F_r$ max.   | 265 kN      |
| Maximum static radial loads $F_{or}$ max. | 380 kN      |