


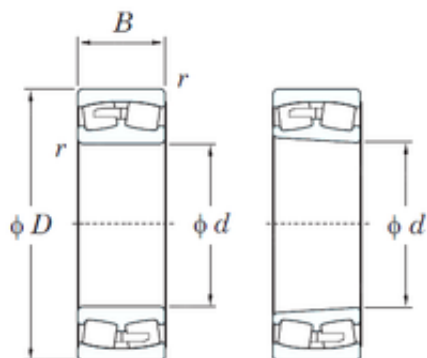

**Bearing No. 24088RK30**

|                               |             |
|-------------------------------|-------------|
| D                             | 650 mm      |
| d                             | 440 mm      |
| B                             | 212 mm      |
| C                             | 212 mm      |
| Weight                        | 243 Kg      |
| r min.                        | 6 mm        |
| da min.                       | 468 mm      |
| Da max.                       | 622 mm      |
| ra max.                       | 5 mm        |
| Size (mm)                     | 440x650x212 |
| Width (mm)                    | 212         |
| Bearing number                | 24088RK30   |
| Bore Diameter (mm)            | 440         |
| Outer Diameter (mm)           | 650         |
| Calculation factor (e)        | 0,29        |
| (Oil) Lubrication Speed       | 490 r/min   |
| Calculation factor (Y0)       | 2,3         |
| Calculation factor (Y1)       | 2,35        |
| (Grease) Lubrication Speed    | 370 r/min   |
| Basic dynamic load rating (C) | 3910 kN     |
| Basic static load rating (C0) | 8320 kN     |