


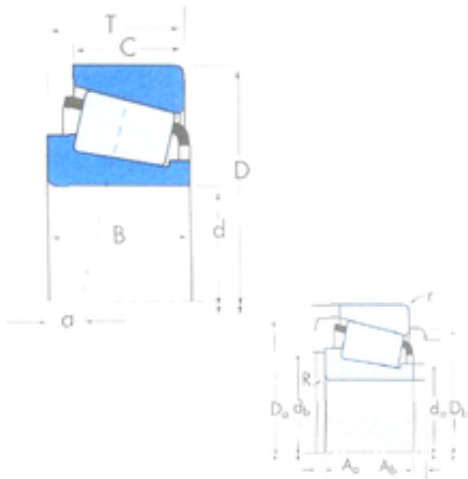

Bearing No. 17098/17244

|                                 |                  |
|---------------------------------|------------------|
| R                               | 1,5 mm           |
| d                               | 24,981 mm        |
| D                               | 62 mm            |
| T                               | 16,002 mm        |
| B                               | 16,566 mm        |
| C                               | 14,288 mm        |
| r                               | 1,5 mm           |
| Da                              | 57 mm            |
| Ab                              | 1,8 mm           |
| Aa                              | 0,3 mm           |
| Db                              | 54 mm            |
| da                              | 30,5 mm          |
| db                              | 33 mm            |
| a -                             | 3,6 mm           |
| Weight                          | 0,25 Kg          |
| Size (mm)                       | 24.981x62x16.002 |
| Width (mm)                      | 16,002           |
| Factor (K)                      | 1,53             |
| Factor (G1)                     | 11,8             |
| Factor (Cg)                     | 0,0133           |
| Factor (G2)                     | 8,9              |
| Bearing number                  | 17098/17244      |
| Bore Diameter (mm)              | 24,981           |
| Outer Diameter (mm)             | 62               |
| Calculation factor (e)          | 0,38             |
| Basic static load rating (C0)   | 44,1 kN          |
| Basic dynamic load rating (C1)  | 40 kN            |
| Basic dynamic load rating (C90) | 10,4             |

|                                  |     |
|----------------------------------|-----|
| Basic dynamic load rating (Ca90) | 6,8 |
|----------------------------------|-----|