


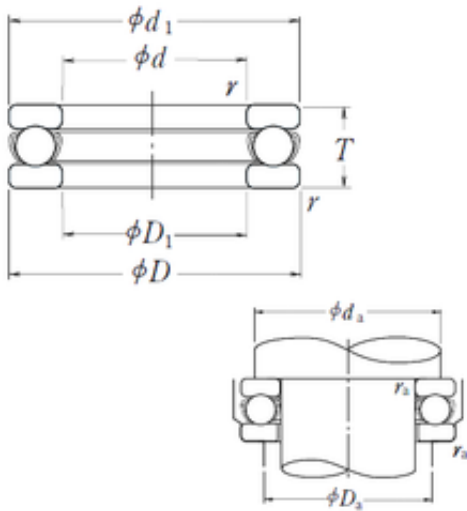

Bearing No. 51204

r	0.6
C	22.5
d	20 mm
D	40 mm
T	14 mm
C0	37.5
Z_	12
B_	14
da	32
D1	22 mm
ra	0.6
D_	40
d1	40 mm
T_	14
DA_	7.144
D_1	22
SRI	3.9
D_a	28
SRE	3.9
SREX	0.04
KBRG	5111
mass	0.077
SRIX	0.04
SRIN	0
SREN	0
yobi	51204
SDM_	30
Noun	Bearing
UNSPSC	31171552
LangID	1

Bore 1	0.787 Inch 20 Millimeter
Height	0.551 Inch 14 Millimeter
Bore 2	0.866 Inch 22 Millimeter
Banded	No
r min.	0,6 mm
Weight	0,077 Kg
hidYobi	51204
GRS rpm	4300
da min.	32 mm
Da max.	28 mm
ra max.	0,6 mm
series:	51200
Oil rpm	6300
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	20x40x14
race type:	Flat
Width (mm)	14
Prod_Type3	TB_SD_WFS
maximum rpm:	6300 rpm
Weight / LBS	0.16976
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
cage material:	Steel Cage
overall width:	14 mm
Other Features	Single Row With Flat Seat
Keyword String	Ball Thrust

Thrust Bearing	Yes
bore diameter:	20 mm
Bearing number	51204
fillet radius:	.6 mm
Precision Class	Non-Precision
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	1.575 Inch 40 Millimeter
Long Description	20MM Bore 1; 22MM Bore 2; 40MM Outside Diameter; 14MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
outside diameter:	40 mm
Manufacturer Name	NSK
Weight / Kilogram	0.08
precision rating:	ABEC1, P0
Bore Diameter (mm)	20
Outer Diameter (mm)	40
separable or banded:	Separable
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
static load capacity:	8500 lbf
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	5050 lbf
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	51204
outside diameter design:	Straight
(Grease) Lubrication Speed	4300 r/min

Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	22,5 kN
Basic static load rating (C0)	37,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter