


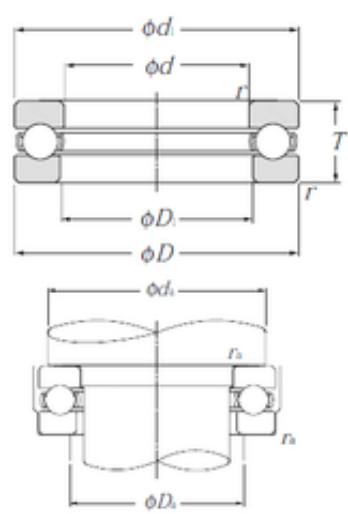

Bearing No. 51204

D	40 mm
d	20 mm
T	14 mm
d1	40 mm
D1	22 mm
Noun	Bearing
Height	0.551 Inch 14 Millimeter
Weight	0,081 Kg
Bore 1	0.787 Inch 20 Millimeter
UNSPSC	31171552
Banded	No
r min.	0,6 mm
Bore 2	0.866 Inch 22 Millimeter
da min.	32 mm
ra max.	0,6 mm
Da max.	28 mm
series:	512
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	20x40x14
Width (mm)	14
Weight / LBS	0.17857
maximum rpm:	5900 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	20 mm
overall width:	14 mm

Keyword String	Ball Thrust
cage material:	Resin
fillet radius:	0.6 mm
Bearing number	51204
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	20MM Bore 1; 22MM Bore 2; 40MM Outside Diameter; 14MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	1.575 Inch 40 Millimeter
Weight / Kilogram	0.081
outside diameter:	40 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Bore Diameter (mm)	20
Outer Diameter (mm)	40
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
Component Description	Roller Assembly Plus Raceways
static load capacity:	37500 N
dynamic load capacity:	22300 N
Harmonized Tariff Code	8482.10.50.08

Manufacturer Item Number	51204
outside diameter design:	Straight
(Grease) Lubrication Speed	4 100 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	37,5 kN
Basic dynamic load rating (C)	22,3 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter