


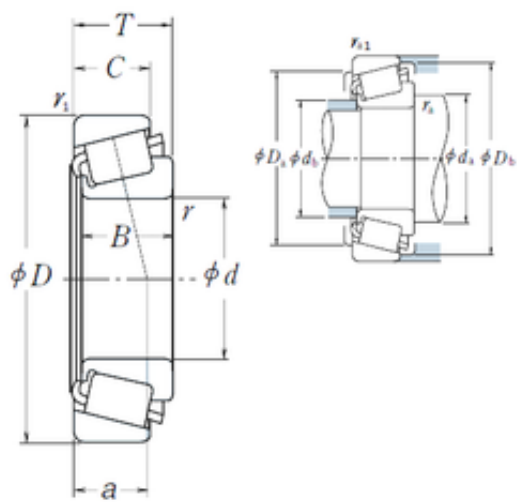

Bearing No. M84249/M84210

e	0.55
d	25,4 mm
D	59,53 mm
T	23,368 mm
B	23,114 mm
C	18,288 mm
a	18,3 mm
Da	49,5 mm
B_	23.114
Db	56 mm
da	36 mm
Y0	0.6
db	32,5 mm
C0	58
D_	59.53
Z_	14
C_	18.288
Y1	1.1
DE_	48.647
SLR	17.5
D_a	49.5
DI_	34.883
DA1	8.154
DA2	6.383
CUP	0.13
DA_	7.274
D_b	56
RAr	80.138
SDM_	41.942
KBRG	3161

yobi	M84249/M84210
CONE	0.194
ALP21	40
ALP22	0
ALP23	0
BETA_	2
BET21	5
BET23	0
BET22	50
r min.	0,8 mm
LangID	1
Weight	0,324 Kg
ALPHA_	20
r1 min.	1,5 mm
ra max.	0,8 mm
Oil rpm	9000
outer r	1.5
hidYobi	M84249/M84210
GRS rpm	6300
inner r	0.8
hidTable	ecat_NSTPRI
inner ra	0.8
outer rb	1.5
ra1 max.	1,5 mm
Size (mm)	25.4x59.53x23.368
SHOG_yobi	M84249R/M84210R
Prod_Type3	TRBSR_ID_A
Width (mm)	23,368
Bearing number	M84249/M84210
Bore Diameter (mm)	25,4
Outer Diameter (mm)	59,53
Calculation factor (e)	0,55

(Oil) Lubrication Speed	9000 r/min
Calculation factor (Y0)	0,6
(Grease) Lubrication Speed	6300 r/min
Basic static load rating (C0)	58 kN
Basic dynamic load rating (C)	50 kN