


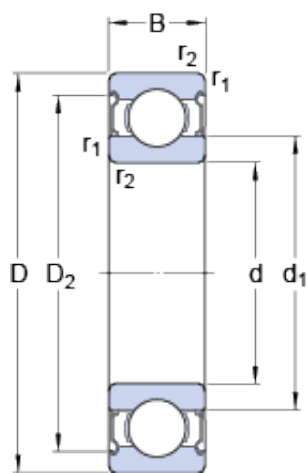

Bearing No. W 6007-2Z

D	62 mm
d	35 mm
B	14 mm
Bore	1.378 Inch 35 Millimeter
Noun	Bearing
UNSPSC	31171504
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Metal Shields
Size (mm)	62x35x14
Snap Ring	No
Width (mm)	14
Mass bearing	0.15 kg
Weight / LBS	0.351
Inch - Metric	Metric
Cage Material	Stainless Steel
D ₂	57.05 mm
d ₁	44 mm
Product Group	B00308
Other Features	Deep Groove
Keyword String	Ball
Bearing number	W 6007-2Z
Limiting speed	12000 r/min
Rolling Element	Ball Bearing
Reference speed	24000 r/min
Precision Class	ABEC 1 ISO P0
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter

Manufacturer URL	http://www.skf.com
Long Description	35MM Bore; 62MM Outside Diameter; 14MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stai
Outer Race Width	0.551 Inch 14 Millimeter
Weight / Kilogram	0
Manufacturer Name	SKF
D _a max.	57.5 mm
Bore Diameter (mm)	62
d _a max.	43.5 mm
Internal Clearance	C0-Medium
r _a max.	1 mm
d _a min.	40 mm
Outer Diameter (mm)	35
r _a - max.	1 mm
D _a - max.	57.5 mm
d _a - min.	40 mm
Minimum Buy Quantity	N/A
r _{1,2} min.	1 mm
d _a - max.	43.5 mm
D ₂ ?	57.05 mm
d ₁ ?	44 mm
r _{1,2} - min.	1 mm
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	W 6007-2Z
Internal Special Features	No

Basic dynamic load rating C	13.8 kN
Basic dynamic load rating - C	13.8 kN
Maximum Capacity / Filling Slot	No
Fatigue load limit P_u	0.44 kN
Calculation factor k_r	0.03
Calculation factor f_0	14.9
Calculation factor - k_r	0.03
Fatigue load limit - P_u	0.44 kN
Calculation factor - f_0	14.9
Basic static load rating C_0	10.2 kN
Basic static load rating - C_0	10.2 kN