


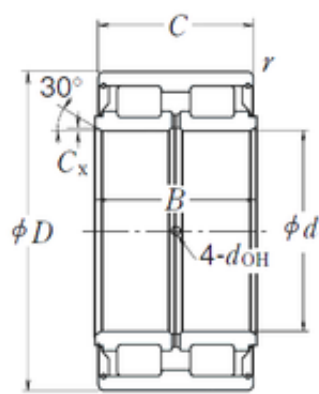

Bearing No. RS-5052

|            |                  |
|------------|------------------|
| r          | 189              |
| d          | 260 mm           |
| D          | 400 mm           |
| B          | 190 mm           |
| C          | 189 mm           |
| B_         | 190              |
| D_         | 400              |
| Z_         | 29               |
| C2         | 2 mm             |
| C0         | 4500             |
| Cx         | 2                |
| DI_        | 298              |
| DA_        | 36               |
| DE_        | 370              |
| doh        | 8                |
| KBRG       | 4220             |
| mass       | 86               |
| SDM_       | 334              |
| yobi       | RS-5052          |
| r_min      | 1.5              |
| LangID     | 1                |
| da_min     | 270              |
| Weight     | 86 Kg            |
| r min.     | 1,5 mm           |
| GRS rpm    | 360              |
| hidYobi    | RS-5052          |
| hidTable   | ecat_NSCLDRSG    |
| Size (mm)  | 260x400x190      |
| Prod_Type3 | CRB_FRFS_PT_WOLR |
| Width (mm) | 190              |
|            |                  |

|                               |         |
|-------------------------------|---------|
| Bearing number                | RS-5052 |
| Bore Diameter (mm)            | 260     |
| Outer Diameter (mm)           | 400     |
| Basic dynamic load rating (C) | 2130 kN |
| Basic static load rating (C0) | 4500 kN |