


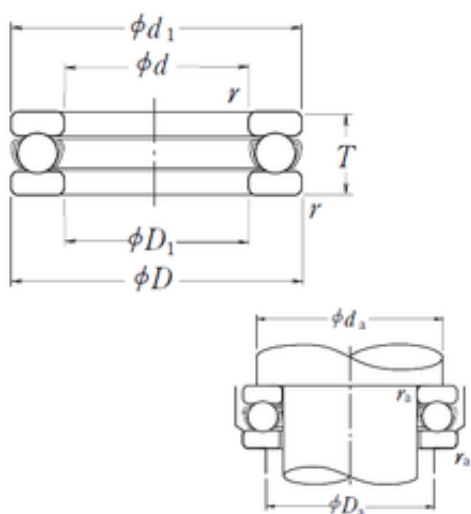

Bearing No. 51206

C	29.5
r	0.6
d	30 mm
D	52 mm
T	16 mm
D_	52
da	43
C0	58
Z_	15
ra	0.6
B_	16
d1	52 mm
D1	32 mm
T_	16
D_1	32
SRE	4.3
D_a	39
DA_	7.938
SRI	4.3
mass	0.137
SRIX	0.04
SRIN	0
SREX	0.04
Noun	Bearing
KBRG	5111
SREN	0
yobi	51206
SDM_	41.5
r min.	0,6 mm
Banded	No

LangID	1
Height	0.63 Inch 16 Millimeter
Weight	0,137 Kg
Bore 1	1.181 Inch 30 Millimeter
UNSPSC	31171552
Bore 2	1.26 Inch 32 Millimeter
series:	512
Oil rpm	5300
Da max.	39 mm
da min.	43 mm
GRS rpm	3400
ra max.	0,6 mm
hidYobi	51206
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	30x52x16
race type:	Flat
Width (mm)	16
Prod_Type3	TB_SD_WFS
Weight / LBS	0.30203
maximum rpm:	5300 RPM
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
fillet radius:	0.6 mm
Bearing number	51206
Other Features	Single Row With Flat Seat
bore diameter:	30 mm
cage material:	Steel
Thrust Bearing	Yes

Keyword String	Ball Thrust
overall width:	16 mm
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.047 Inch 52 Millimeter
Long Description	30MM Bore 1; 32MM Bore 2; 52MM Outside Diameter; 16MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
outside diameter:	52 mm
Manufacturer Name	NSK
precision rating:	ABEC 1 (ISO Class Normal)
Weight / Kilogram	0.15
Bore Diameter (mm)	30
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	5950 kg
Harmonized Tariff Code	8482.10.50.08
dynamic load capacity:	3000 kg
Manufacturer Item Number	51206
outside diameter design:	Straight
Single or Double Direction	Single Direction
(Grease) Lubrication	3400 r/min

Speed	
operating temperature range:	Maximum of +120 °C
Basic static load rating (C0)	58 kN
Basic dynamic load rating (C)	29,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter