


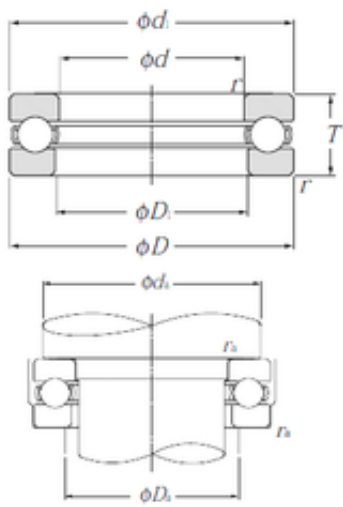

Bearing No. 51206

D	52 mm
d	30 mm
T	16 mm
d1	52 mm
D1	32 mm
Noun	Bearing
Bore 2	1.26 Inch 32 Millimeter
Weight	0,139 Kg
Bore 1	1.181 Inch 30 Millimeter
UNSPSC	31171552
Banded	No
r min.	0,6 mm
Height	0.63 Inch 16 Millimeter
da min.	43 mm
ra max.	0,6 mm
Da max.	39 mm
series:	512
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	30x52x16
Width (mm)	16
Weight / LBS	0.30644
maximum rpm:	4900 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	30 mm
overall width:	16 mm
Keyword String	Ball Thrust

cage material:	Resin
fillet radius:	0.6 mm
Bearing number	51206
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	2.047 Inch 52 Millimeter
Long Description	30MM Bore 1; 32MM Bore 2; 52MM Outside Diameter; 16MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
precision rating:	ISO Class 0
Weight / Kilogram	0.129
Manufacturer Name	NTN
outside diameter:	52 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	30
Outer Diameter (mm)	52
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
static load capacity:	58000 N
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	29300 N
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item	51206

Number	
outside diameter design:	Straight
(Grease) Lubrication Speed	3 400 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	58 kN
Basic dynamic load rating (C)	29,3 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter