


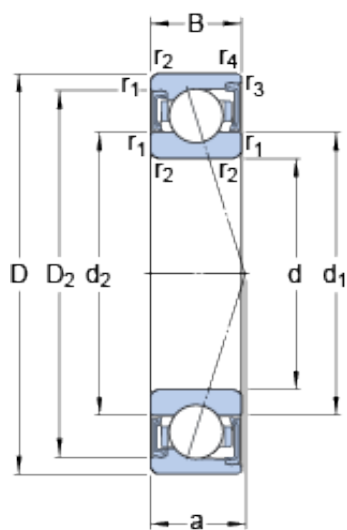

Bearing No. S7013 ACD/P4A

a	28.3 mm
d	65 mm
D	100 mm
B	18 mm
Noun	Bearing
Bore	2.559 Inch 65 Millimeter
Width	0.709 Inch 18 Millimeter
UNSPSC	31171531
Preload	None
Ball - z	20
Category	Precision Ball Bearings
Enclosure	2 Seals
Size (mm)	100x65x18
Inventory	0.0
Width (mm)	18
Weight / LBS	1.036
Flush Ground	No
Mass bearing	0.43 kg
d ₁	75.8 mm
d ₂	75.8 mm
Inch - Metric	Metric
Cage Material	Phenolic
D ₂	91.73 mm
Contact Angle	25 Degree
Product Group	B04270
Raceway Style	1 Rib Outer Ring
D ₂	91.73 mm
d ₁	75.8 mm

d ₂	75.8 mm
Bearing number	S7013 ACD/P4A
Other Features	Single Row Angular Contact High Precision
Keyword String	Angular Contact Ball
Enclosure Type	Non Contact Seal
Material - Ball	Steel
Precision Class	ABEC 7 ISO P4
Preload class D	409 N/micron
Preload class C	302 N/micron
Preload class B	227 N/micron
Preload class A	174 N/micron
Rolling Element	Ball Bearing
Outside Diameter	3.937 Inch 100 Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Width; 2 Seals Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 25 Degree Contact Angle; Phenolic Cage Material; 1 Rib Outer Ring
Manufacturer URL	http://www.skf.com
Number of balls z	20
Weight / Kilogram	0.47
Manufacturer Name	SKF
Number of Bearings	1 (Single)
r _b max.	0.6 mm
r _a max.	1 mm
D _b max.	96.8 mm
D _a max.	94 mm
d _b max.	75.2 mm

d_b min.	71 mm
d_a max.	75.2 mm
d_a min.	71 mm
Bore Diameter (mm)	100
Outer Diameter (mm)	65
$r_{1,2}$ min.	1.1 mm
Calculation factor f	1.13
d_a - min.	71 mm
Calculation factor e	0.68
d_a - max.	75.2 mm
$r_{3,4}$ min.	0.6 mm
Ball - D_w	11.112 mm
d_b - min.	71 mm
D_a - max.	94 mm
D_b - max.	96.8 mm
r_a - max.	1 mm
r_b - max.	0.6 mm
d_b - max.	75.2 mm
Minimum Buy Quantity	N/A
Calculation factor - f	1.13
Harmonized Tariff Code	8482.10.50.28
$r_{3,4}$ - min.	0.6 mm
Calculation factor - e	0.68
$r_{1,2}$ - min.	1.1 mm
Manufacturer Item Number	S7013 ACD/P4A
Ball diameter D_w	11.112 mm
Basic dynamic load rating C	39 kN
Preload class A G_A	240 N
Preload class C G_C	960 N
Preload class D G_D	1920 N
Preload class B G_B	480 N

Basic dynamic load rating - C	39 kN
Preload class D - G_D	1920 N
Preload class B - G_B	480 N
Preload class A - G_A	240 N
Preload class C - G_C	960 N
Calculation factor f_1	0.99
Fatigue load limit P_u	1.5 kN
Calculation factor f_{2B}	1.02
Calculation factor f_{2A}	1
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.08
Calculation factor f_{HC}	1
Calculation factor - Y_2	1.41
Fatigue load limit - P_u	1.5 kN
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Calculation factor - f_1	0.99
Calculation factor - Y_1	0.92
Calculation factor - f_{2D}	1.08
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2A}	1
Calculation factor - f_{HC}	1
Limiting speed for grease lubrication	12000 r/min
Basic static load rating C_0	35.5 kN
Static axial stiffness, preload class D	409 N/ μ m
Static axial stiffness,	302 N/ μ m

preload class C	
Static axial stiffness, preload class A	174 N/μm
Attainable speed for grease lubrication	12000 r/min
Static axial stiffness, preload class B	227 N/μm
Basic static load rating - C_0	35.5 kN
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back- to-back, face-to-face) Y_1	0.92
Calculation factor (back- to-back, face-to-face) Y_2	1.41
Calculation factor (back- to-back, face-to-face) Y_0	0.76
Calculation factor (back- to-back, face-to-face) X_2	0.67