


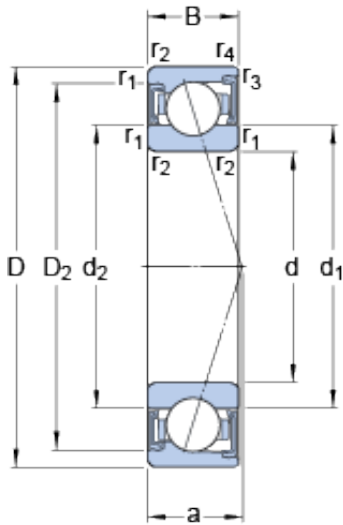

Bearing No. S7011 CD/HCP4A

|                     |                |
|---------------------|----------------|
| D                   | 90 mm          |
| d                   | 55 mm          |
| B                   | 18 mm          |
| a                   | 18.8 mm        |
| Ball - z            | 18             |
| Size (mm)           | 90x55x18       |
| Width (mm)          | 18             |
| Mass bearing        | 0.32 kg        |
| D <sub>2</sub>      | 81.8 mm        |
| d <sub>2</sub>      | 65.8 mm        |
| d <sub>1</sub>      | 65.8 mm        |
| d <sub>2</sub>      | 65.8 mm        |
| D <sub>2</sub>      | 81.8 mm        |
| d <sub>1</sub>      | 65.8 mm        |
| Bearing number      | S7011 CD/HCP4A |
| Preload class A     | 75 N/micron    |
| Preload class B     | 102 N/micron   |
| Preload class D     | 207 N/micron   |
| Preload class C     | 143 N/micron   |
| Number of balls z   | 18             |
| r <sub>b</sub> max. | 0.6 mm         |
| r <sub>a</sub> max. | 1 mm           |
| D <sub>b</sub> max. | 86.8 mm        |
| D <sub>a</sub> max. | 84 mm          |
| d <sub>b</sub> max. | 65.2 mm        |
| d <sub>a</sub> max. | 65.2 mm        |
| d <sub>a</sub> min. | 61 mm          |
| Bore Diameter (mm)  | 90             |
| d <sub>b</sub> min. | 61 mm          |
| Outer Diameter (mm) | 55             |

|                               |           |
|-------------------------------|-----------|
| $r_{3,4}$ min.                | 0.6 mm    |
| $d_b$ - min.                  | 61 mm     |
| Calculation factor $f$        | 1.1       |
| $d_a$ - max.                  | 65.2 mm   |
| $r_{1,2}$ min.                | 1.1 mm    |
| $d_a$ - min.                  | 61 mm     |
| $d_b$ - max.                  | 65.2 mm   |
| $D_a$ - max.                  | 84 mm     |
| $D_b$ - max.                  | 86.8 mm   |
| $r_a$ - max.                  | 1 mm      |
| $r_b$ - max.                  | 0.6 mm    |
| Ball - $D_w$                  | 11.112 mm |
| $r_{3,4}$ - min.              | 0.6 mm    |
| Calculation factor - $f$      | 1.1       |
| $r_{1,2}$ - min.              | 1.1 mm    |
| Ball diameter $D_w$           | 11.112 mm |
| Basic dynamic load rating C   | 39.7 kN   |
| Preload class A $G_A$         | 150 N     |
| Basic dynamic load rating - C | 39.7 kN   |
| Preload class C $G_C$         | 600 N     |
| Preload class D $G_D$         | 1200 N    |
| Preload class B $G_B$         | 300 N     |
| Preload class C - $G_C$       | 600 N     |
| Preload class D - $G_D$       | 1200 N    |
| Preload class B - $G_B$       | 300 N     |
| Preload class A - $G_A$       | 150 N     |
| Calculation factor $f_1$      | 1         |
| Fatigue load limit $P_u$      | 1.37 kN   |
| Calculation factor $f_0$      | 15.1      |
| Calculation factor $f_{2D}$   | 1.09      |

|                                         |                |
|-----------------------------------------|----------------|
| Calculation factor $f_{HC}$             | 1.02           |
| Calculation factor $f_{2C}$             | 1.05           |
| Calculation factor $f_{2B}$             | 1.02           |
| Calculation factor $f_{2A}$             | 1              |
| Calculation factor - $f$                | 1              |
| Calculation factor - $f_0$              | 15.1           |
| Fatigue load limit - $P_u$              | 1.4 kN         |
| Calculation factor - $f_{2C}$           | 1.05           |
| Calculation factor - $f_{2D}$           | 1.09           |
| Calculation factor - $f_{2B}$           | 1.02           |
| Calculation factor - $f_{2A}$           | 1              |
| Calculation factor - $f_{HC}$           | 1.02           |
| Limiting speed for grease lubrication   | 18000 r/min    |
| Basic static load rating $C_0$          | 32.5 kN        |
| Static axial stiffness, preload class A | 75 N/ $\mu$ m  |
| Static axial stiffness, preload class B | 102 N/ $\mu$ m |
| Static axial stiffness, preload class C | 143 N/ $\mu$ m |
| Static axial stiffness, preload class D | 207 N/ $\mu$ m |
| Attainable speed for grease lubrication | 18000 r/min    |
| Basic static load rating - $C_0$        | 32.5 kN        |