


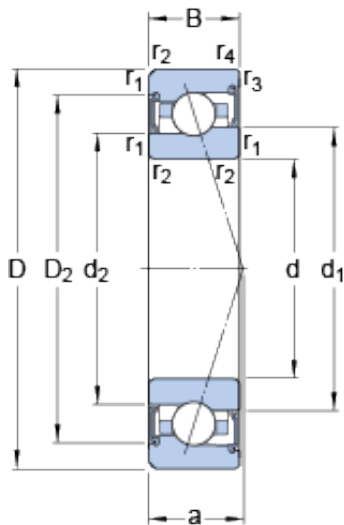

Bearing No. S7011 CE/HCP4A

D	90 mm
d	55 mm
B	18 mm
a	18.8 mm
Ball - z	24
Size (mm)	90x55x18
Width (mm)	18
Mass bearing	0.37 kg
D ₂	80.4 mm
d ₂	65.6 mm
d ₁	67.73 mm
d ₂	65.6 mm
D ₂	80.4 mm
d ₁	67.73 mm
Bearing number	S7011 CE/HCP4A
Preload class B	80 N/micron
Preload class A	51 N/micron
Preload class C	108 N/micron
Number of balls z	24
Bore Diameter (mm)	90
d _a min.	61 mm
d _a max.	67.1 mm
d _b min.	61 mm
d _b max.	65 mm
D _a max.	84 mm
D _b max.	85.8 mm
r _a max.	1 mm
r _b max.	0.6 mm
Outer Diameter (mm)	55
r _{3,4} min.	0.6 mm

d_b - min.	61 mm
Calculation factor f	1.07
d_a - max.	67.1 mm
$r_{1,2}$ min.	1.1 mm
D_a - max.	84 mm
d_b - max.	65 mm
D_b - max.	85.8 mm
r_a - max.	1 mm
d_a - min.	61 mm
Ball - D_w	7.938 mm
r_b - max.	0.6 mm
$r_{3,4}$ - min.	0.6 mm
Calculation factor - f	1.07
$r_{1,2}$ - min.	1.1 mm
Basic dynamic load rating C	16.8 kN
Ball diameter D_w	7.938 mm
Basic dynamic load rating - C	16.8 kN
Preload class A G_A	90 N
Preload class B G_B	270 N
Preload class C G_C	540 N
Preload class A - G_A	90 N
Preload class B - G_B	270 N
Preload class C - G_C	540 N
Fatigue load limit P_u	0.52 kN
Calculation factor f_1	1
Calculation factor f_0	8.4
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1.01
Calculation factor f_{2B}	1.03
Calculation factor f_{2A}	1

Calculation factor - f	1
Calculation factor - f_0	8.4
Fatigue load limit - P_u	0.52 kN
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.03
Calculation factor - f_{HC}	1.01
Limiting speed for grease lubrication	25000 r/min
Basic static load rating C_0	12.2 kN
Static axial stiffness, preload class B	80 N/ μ m
Static axial stiffness, preload class C	108 N/ μ m
Static axial stiffness, preload class A	51 N/ μ m
Attainable speed for grease lubrication	25000 r/min
Basic static load rating - C_0	12.2 kN