
Loyal | S7009 CB/HCP4A

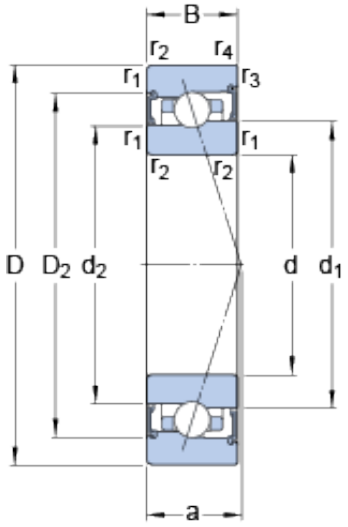

Bearing No. S7009 CB/HCP4A

D	75 mm
d	45 mm
B	16 mm
a	16.1 mm
Ball - z	25
Size (mm)	75x45x16
Width (mm)	16
Mass bearing	0.25 kg
D_2	65.58 mm
d_2	55.17 mm
d_1	56.44 mm
d_2	55.17 mm
D_2	65.58 mm
d_1	56.44 mm
Bearing number	S7009 CB/HCP4A
Preload class B	45 N/micron
Preload class A	34 N/micron
Preload class C	70 N/micron
Number of balls z	25
Bore Diameter (mm)	75
d_a min.	49.6 mm
d_a max.	55.8 mm
d_b min.	49.6 mm
d_b max.	54.6 mm
D_a max.	70.4 mm
D_b max.	71.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Outer Diameter (mm)	45
$r_{3,4}$ min.	0.6 mm

d_b - min.	49.6 mm
Calculation factor f	1.05
d_a - max.	55.8 mm
$r_{1,2}$ min.	1 mm
D_a - max.	70.4 mm
d_b - max.	54.6 mm
D_b - max.	71.8 mm
r_a - max.	1 mm
d_a - min.	49.6 mm
Ball - D_w	5.556 mm
r_b - max.	0.6 mm
$r_{3,4}$ - min.	0.6 mm
Calculation factor - f	1.05
$r_{1,2}$ - min.	1 mm
Basic dynamic load rating C	13 kN
Ball diameter D_w	5.556 mm
Basic dynamic load rating - C	9.6 kN
Preload class A G_A	31 N
Preload class B G_B	62 N
Preload class C G_C	185 N
Preload class A - G_A	31 N
Preload class B - G_B	62 N
Preload class C - G_C	185 N
Fatigue load limit P_u	0.305 kN
Calculation factor f_1	1
Calculation factor f_0	9.6
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1.01
Calculation factor f_{2B}	1.02
Calculation factor f_{2A}	1

Calculation factor - f	1
Calculation factor - f_0	9.6
Fatigue load limit - P_u	0.305 kN
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.02
Calculation factor - f_{HC}	1.01
Limiting speed for grease lubrication	30000 r/min
Basic static load rating C_0	12.2 kN
Static axial stiffness, preload class B	45 N/µm
Static axial stiffness, preload class C	70 N/µm
Static axial stiffness, preload class A	34 N/µm
Attainable speed for grease lubrication	30000 r/min
Basic static load rating - C_0	7.2 kN