


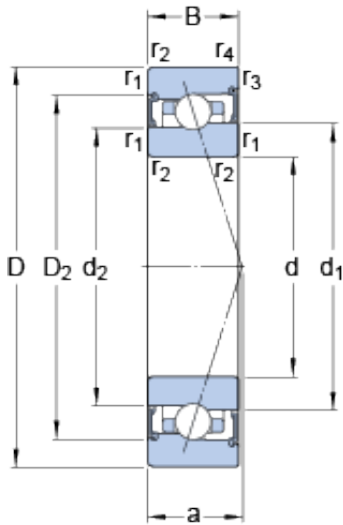

Bearing No. S7007 CB/HCP4A

D	62 mm
d	35 mm
B	14 mm
a	13.6 mm
Ball - z	23
Size (mm)	62x35x14
Width (mm)	14
Mass bearing	0.16 kg
D ₂	53.38 mm
d ₂	44.34 mm
d ₁	45.45 mm
d ₂	44.34 mm
D ₂	53.38 mm
d ₁	45.45 mm
Bearing number	S7007 CB/HCP4A
Preload class B	36 N/micron
Preload class A	28 N/micron
Preload class C	58 N/micron
Number of balls z	23
Bore Diameter (mm)	62
d _a min.	39.6 mm
d _a max.	44.9 mm
d _b min.	39.6 mm
d _b max.	43.7 mm
D _a max.	57.4 mm
D _b max.	58.8 mm
r _a max.	1 mm
r _b max.	0.6 mm
Outer Diameter (mm)	35
r _{3,4} min.	0.6 mm

d_b - min.	39.6 mm
Calculation factor f	1.04
d_a - max.	44.9 mm
$r_{1,2}$ min.	1 mm
D_a - max.	57.4 mm
d_b - max.	43.7 mm
D_b - max.	58.8 mm
r_a - max.	1 mm
d_a - min.	39.6 mm
Ball - D_w	4.762 mm
r_b - max.	0.6 mm
$r_{3,4}$ - min.	0.6 mm
Calculation factor - f	1.04
$r_{1,2}$ - min.	1 mm
Basic dynamic load rating C	9.36 kN
Ball diameter D_w	4.762 mm
Basic dynamic load rating - C	6.9 kN
Preload class A G_A	23 N
Preload class B G_B	46 N
Preload class C G_C	140 N
Preload class A - G_A	23 N
Preload class B - G_B	46 N
Preload class C - G_C	140 N
Fatigue load limit P_u	0.204 kN
Calculation factor f_1	1
Calculation factor f_0	9.6
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1.01
Calculation factor f_{2B}	1.02
Calculation factor f_{2A}	1

Calculation factor - f	1
Calculation factor - f_0	9.6
Fatigue load limit - P_u	0.204 kN
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.02
Calculation factor - f_{HC}	1.01
Limiting speed for grease lubrication	38000 r/min
Basic static load rating C_0	8.3 kN
Static axial stiffness, preload class B	36 N/ μ m
Static axial stiffness, preload class C	58 N/ μ m
Static axial stiffness, preload class A	28 N/ μ m
Attainable speed for grease lubrication	38000 r/min
Basic static load rating - C_0	4.8 kN