


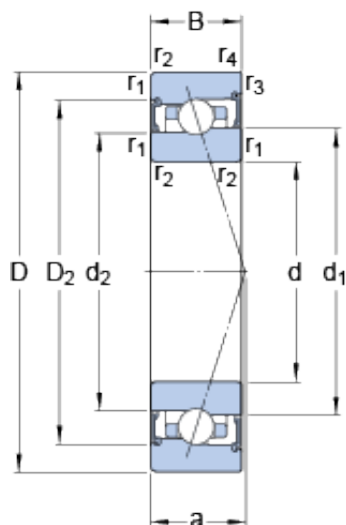

Bearing No. S7008 ACB/HCP4A

D	68 mm
d	40 mm
B	15 mm
a	20.2 mm
Ball - z	26
Size (mm)	68x40x15
Width (mm)	15
Mass bearing	0.2 kg
D ₂	58.88 mm
d ₂	49.87 mm
d ₁	50.95 mm
d ₂	49.87 mm
D ₂	58.88 mm
d ₁	50.95 mm
Bearing number	S7008 ACB/HCP4A
Preload class A	80 N/micron
Preload class B	102 N/micron
Preload class C	153 N/micron
Number of balls z	26
r _b max.	0.6 mm
r _a max.	1 mm
D _b max.	64.8 mm
D _a max.	63.4 mm
d _b max.	49.3 mm
d _b min.	44.6 mm
d _a max.	50.4 mm
Bore Diameter (mm)	68
d _a min.	44.6 mm
Outer Diameter (mm)	40
d _a - max.	50.4 mm

d_a - min.	44.6 mm
Calculation factor e	0.68
Calculation factor f	1.04
d_b - max.	49.3 mm
D_a - max.	63.4 mm
r_a - max.	1 mm
r_b - max.	0.6 mm
d_b - min.	44.6 mm
$r_{3,4}$ min.	0.6 mm
$r_{1,2}$ min.	1 mm
Ball - D_w	4.762 mm
D_b - max.	64.8 mm
$r_{3,4}$ - min.	0.6 mm
Calculation factor - f	1.04
Calculation factor - e	0.68
$r_{1,2}$ - min.	1 mm
Basic dynamic load rating C	9.36 kN
Ball diameter D_w	4.762 mm
Preload class A G_A	41 N
Basic dynamic load rating - C	6.9 kN
Preload class C G_C	245 N
Preload class B G_B	82 N
Preload class B - G_B	82 N
Preload class A - G_A	41 N
Preload class C - G_C	245 N
Calculation factor f_1	0.99
Fatigue load limit P_u	0.224 kN
Calculation factor f_{HC}	1.01
Calculation factor f_{2C}	1.05
Calculation factor f_{2B}	1.02

Calculation factor f_{2A}	1
Calculation factor - X_2	0.67
Calculation factor - Y_0	0.76
Calculation factor - Y_1	0.92
Calculation factor - f_1	0.99
Calculation factor - Y_2	1.41
Fatigue load limit - P_u	0.224 kN
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{HC}	1.01
Limiting speed for grease lubrication	32000 r/min
Basic static load rating C_0	8.65 kN
Static axial stiffness, preload class C	153 N/ μ m
Static axial stiffness, preload class B	102 N/ μ m
Attainable speed for grease lubrication	32000 r/min
Static axial stiffness, preload class A	80 N/ μ m
Basic static load rating - C_0	5.3 kN
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-	1.41

to-back, face-to-face) Y_2	
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67