




Bearing No. M236848/M236810

|                                 |                     |
|---------------------------------|---------------------|
| R                               | 7,9 mm              |
| d                               | 177,8 mm            |
| D                               | 260,35 mm           |
| T                               | 53,975 mm           |
| B                               | 53,975 mm           |
| C                               | 41,275 mm           |
| r                               | 3,3 mm              |
| Da                              | 249 mm              |
| Ab                              | 3,2 mm              |
| Aa                              | 4,6 mm              |
| Db                              | 241 mm              |
| da                              | 191 mm              |
| db                              | 204 mm              |
| a -                             | 6,6 mm              |
| Weight                          | 8,94 Kg             |
| Size (mm)                       | 177.8x260.35x53.975 |
| Width (mm)                      | 53,975              |
| Factor (K)                      | 1,76                |
| Factor (G1)                     | 690,9               |
| Factor (Cg)                     | 0,0317              |
| Factor (G2)                     | 100,2               |
| Bearing number                  | M236848/M236810     |
| Bore Diameter (mm)              | 177,8               |
| Outer Diameter (mm)             | 260,35              |
| Calculation factor (e)          | 0,33                |
| Basic static load rating (C0)   | 933 kN              |
| Basic dynamic load rating (C1)  | 497 kN              |
| Basic dynamic load rating (C90) | 129                 |

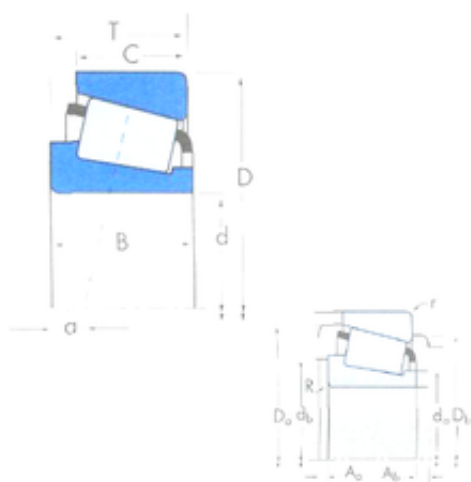

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 73,4 |
|----------------------------------|------|