


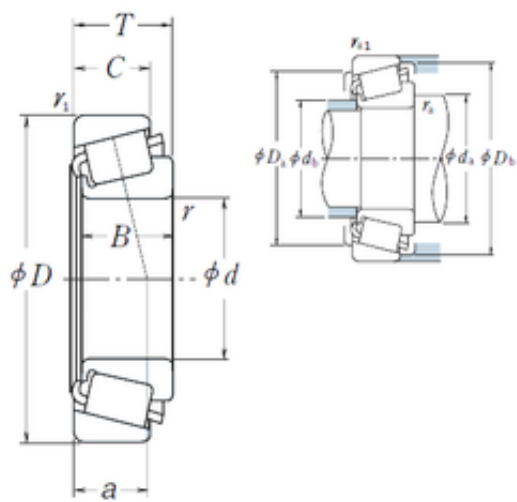

Bearing No. M236849/M236810

e	0.33
d	177,8 mm
D	260,35 mm
T	53,975 mm
B	53,975 mm
C	41,275 mm
a	47,5 mm
Da	241 mm
B_	53.975
Db	249 mm
da	195 mm
Y0	0.99
db	192 mm
C0	835
D_	260.35
Z_	29
C_	41.275
Y1	1.8
DE_	237.548
SLR	39.5
D_a	241
DI_	199.452
DA1	20.191
DA2	18.793
CUP	2.86
DA_	19.494
D_b	249
RAr	569
SDM_	218.693
KBRG	3161

yobi	M236849/M236810
CONE	6.49
ALP21	25
ALP22	0
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	2
r min.	3,5 mm
LangID	1
Weight	9,35 Kg
ALPHA_	12.5
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	1700
outer r	3.3
hidYobi	M236849/M236810
GRS rpm	1200
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	177.8x260.35x53.975
SHOG_yobi	M236849R/M236810R
Prod_Type3	TRBSR_ID_A
Width (mm)	53,975
Bearing number	M236849/M236810
Bore Diameter (mm)	177,8
Outer Diameter (mm)	260,35
Calculation factor (e)	0,33

(Oil) Lubrication Speed	1700 r/min
Calculation factor (Y0)	0,99
(Grease) Lubrication Speed	1200 r/min
Basic static load rating (C0)	835 kN
Basic dynamic load rating (C)	455 kN