


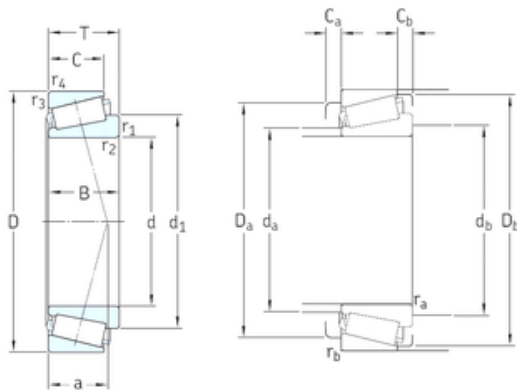

Bearing No. M239448A/410

D	279,4 mm
d	191,237 mm
T	52,388 mm
B	58,81 mm
C	41,33 mm
a	49 mm
d1	232 mm
Weight	9,2 Kg
db min	204 mm
Da min	254 mm
da max	211 mm
Ca min.	9 mm
Cb min.	11 mm
Db min.	266 mm
Da max.	265 mm
r1 min.	3,3 mm
r4 min.	3,3 mm
r3 min.	3,3 mm
r2 min.	3,3 mm
rb max.	3,1 mm
ra max.	3,1 mm
Size (mm)	191.237x279.4x52.388
Width (mm)	52,388
Limiting speed	2200 r/min
Bearing number	M239448A/410
Reference speed	1600 r/min
Bore Diameter (mm)	191,237
Outer Diameter (mm)	279,4
Calculation factor (e)	0,33
Calculation factor (Y)	1,8

Fatigue load limit (Pu)	95
Basic dynamic load rating (C)	523 kN
Basic static load rating (C0)	980 kN