


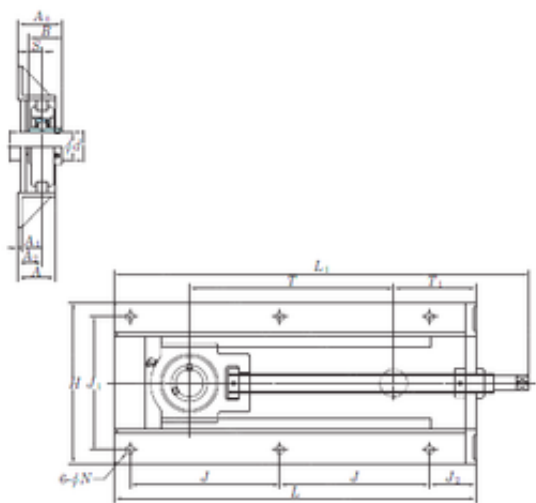

Bearing No. UCTH208-25-300

|                               |                |
|-------------------------------|----------------|
| L                             | 523 mm         |
| B                             | 49,2 mm        |
| T                             | 296 mm         |
| S                             | 19 mm          |
| N                             | 12 mm          |
| J                             | 217 mm         |
| H                             | 234 mm         |
| A                             | 50 mm          |
| d                             | 39,6875 mm     |
| A1                            | 6 mm           |
| J2                            | 67 mm          |
| T1                            | 119 mm         |
| L1                            | 599 mm         |
| A0                            | 65,2 mm        |
| A2                            | 35 mm          |
| J1                            | 192 mm         |
| Weight                        | 12,5 Kg        |
| Bolt (G)                      | M10            |
| Width (mm)                    | 119            |
| Bearing number                | UCTH208-25-300 |
| Bore Diameter (mm)            | 39,6875        |
| Basic dynamic load rating (C) | 29,1 kN        |
| Basic static load rating (C0) | 17,8 kN        |