


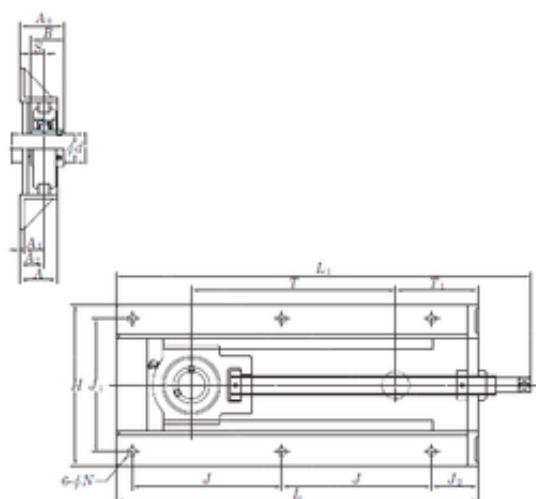

Bearing No. UCTH212-36-300

|                               |                |
|-------------------------------|----------------|
| L                             | 571 mm         |
| B                             | 65,1 mm        |
| T                             | 288 mm         |
| S                             | 25,4 mm        |
| N                             | 15 mm          |
| J                             | 243 mm         |
| H                             | 304 mm         |
| A                             | 65 mm          |
| d                             | 57,15 mm       |
| A1                            | 6 mm           |
| J2                            | 63 mm          |
| T1                            | 154 mm         |
| L1                            | 651 mm         |
| A0                            | 77,7 mm        |
| A2                            | 38 mm          |
| J1                            | 240 mm         |
| Weight                        | 21,4 Kg        |
| Bolt (G)                      | M12            |
| Width (mm)                    | 154            |
| Bearing number                | UCTH212-36-300 |
| Bore Diameter (mm)            | 57,15          |
| Basic dynamic load rating (C) | 52,4 kN        |
| Basic static load rating (C0) | 36,2 kN        |