


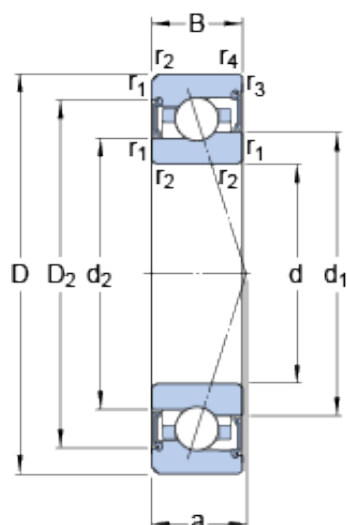

Bearing No. S7000 CE/HCP4A

D	26 mm
d	10 mm
B	8 mm
a	6.5 mm
Ball - z	11
Size (mm)	26x10x8
Width (mm)	8
Mass bearing	0.017 kg
D ₂	22.35 mm
d ₂	14.5 mm
d ₁	15.6 mm
d ₂	14.5 mm
D ₂	22.35 mm
d ₁	15.6 mm
Bearing number	S7000 CE/HCP4A
Preload class B	21 N/micron
Preload class A	13 N/micron
Preload class C	29 N/micron
Number of balls z	11
Bore Diameter (mm)	26
d _a min.	12 mm
d _a max.	15.2 mm
d _b min.	12 mm
d _b max.	14.1 mm
D _a max.	24 mm
D _b max.	23.6 mm
r _a max.	0.3 mm
r _b max.	0.3 mm
Outer Diameter (mm)	10
r _{3,4} min.	0.3 mm

d_b - min.	12 mm
Calculation factor f	1.03
d_a - max.	15.2 mm
$r_{1,2}$ min.	0.3 mm
D_a - max.	24 mm
d_b - max.	14.1 mm
D_b - max.	23.6 mm
r_a - max.	0.3 mm
d_a - min.	12 mm
Ball - D_w	3.969 mm
r_b - max.	0.3 mm
$r_{3,4}$ - min.	0.3 mm
Calculation factor - f	1.03
$r_{1,2}$ - min.	0.3 mm
Basic dynamic load rating C	3.02 kN
Ball diameter D_w	3.969 mm
Basic dynamic load rating - C	3 kN
Preload class A G_A	15 N
Preload class B G_B	48 N
Preload class C G_C	95 N
Preload class A - G_A	15 N
Preload class B - G_B	48 N
Preload class C - G_C	95 N
Fatigue load limit P_u	0.05 kN
Calculation factor f_1	1
Calculation factor f_0	7.1
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1.01
Calculation factor f_{2B}	1.03
Calculation factor f_{2A}	1

Calculation factor - f	1
Calculation factor - f_0	7.1
Fatigue load limit - P_u	0.05 kN
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.03
Calculation factor - f_{HC}	1.01
Limiting speed for grease lubrication	109000 r/min
Basic static load rating C_0	1.18 kN
Static axial stiffness, preload class B	21 N/ μ m
Static axial stiffness, preload class C	29 N/ μ m
Static axial stiffness, preload class A	13 N/ μ m
Attainable speed for grease lubrication	109000 r/min
Basic static load rating - C_0	1.2 kN