




Bearing No. 24044-B-K30-MB+AH24044

n	12,2 mm
C	118 mm
b	18 mm
a	14 mm
l	138 mm
d	220 mm
D	340 mm
B	118 mm
d5	6,3 r/min
D1	297,4 mm
d1	200 mm
Weight	47,01 Kg
r min.	3 mm
da min.	232,4 mm
Da max.	327,6 mm
ra max.	2,5 mm
Size (mm)	220x340x118
Width (mm)	118
Thread (G)	Tr230X4
Limiting speed	1 300 r/min
Bearing number	24044-B-K30-MB+AH24044
Reference speed	1 070 r/min
Bore Diameter (mm)	220
Outer Diameter (mm)	340
Calculation factor (e)	0,34
Fatigue load limit (Pu)	139
Calculation factor (Y0)	1,92
Calculation factor (Y1)	1,96
Basic dynamic load rating (C)	1400 kN

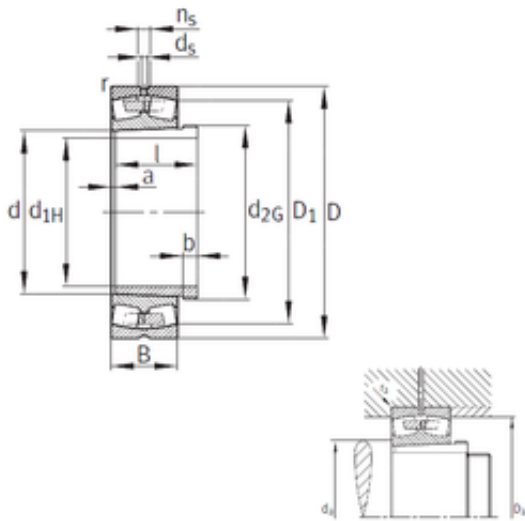

Loyal | 24044-B-K30-MB+AH24044

Basic static load rating (C0)	2700 kN
----------------------------------	---------