


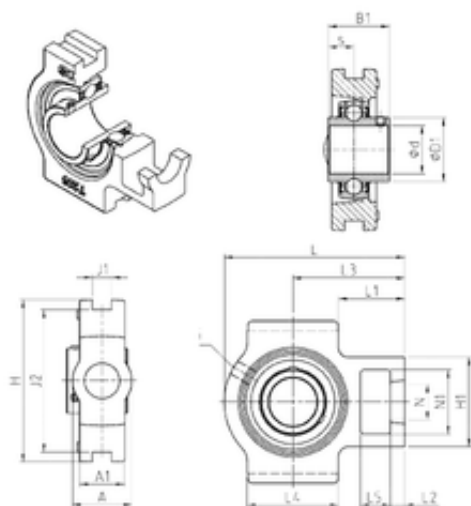

Bearing No. UCT322

C	205 kN
A	130 mm
S	46 mm
G	M10x1
B	117 mm
L	385 mm
H	320 mm
N	65 mm
s	46 mm
d	110 mm
A1	80 mm
SW	9 mm
s1	58.5 mm
N2	125 mm
H2	185 mm
L4	215 mm
A5	71 mm
L5	52 mm
A2	80 mm
J2	285 mm
N1	125 mm
C0	178 kN
L1	127,5 mm
L2	40 mm
H1	185 mm
L3	235 mm
D1	149 mm
B1	117 mm
J1	38 mm
T max.	100 °C

Weight	38,6 Kg
T min.	-20 °C
Thread (G)	M10x1
Bearing number	UCT322
Bore Diameter (mm)	110
Designation of housing	T322-
Designation of bearing	UC322G2
Basic dynamic load rating (C)	205 kN
Recommended tightening torque for set screw	75 Nm