


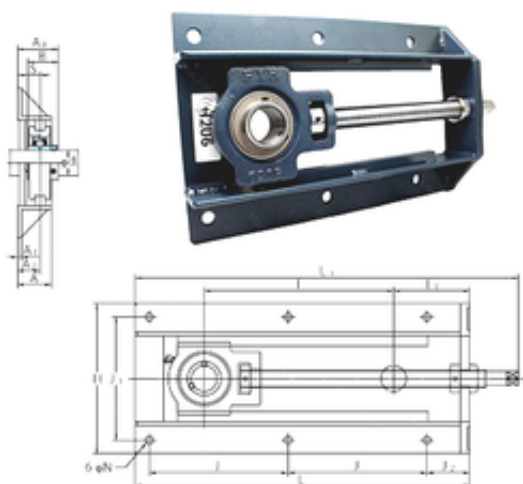

Bearing No. UCTH207-20-230

|                               |                |
|-------------------------------|----------------|
| L                             | 430 mm         |
| B                             | 42,9 mm        |
| T                             | 219 mm         |
| S                             | 17,5 mm        |
| N                             | 12 mm          |
| J                             | 173 mm         |
| H                             | 213 mm         |
| A                             | 50 mm          |
| d                             | 31,75 mm       |
| A1                            | 6 mm           |
| J2                            | 65 mm          |
| T1                            | 107 mm         |
| L1                            | 500 mm         |
| A0                            | 57,4 mm        |
| A2                            | 32 mm          |
| J1                            | 166 mm         |
| Weight                        | 10,5 Kg        |
| Bolt (G)                      | M10            |
| Width (mm)                    | 107            |
| Bearing number                | UCTH207-20-230 |
| Bore Diameter (mm)            | 31,75          |
| Basic dynamic load rating (C) | 3 kN           |
| Basic static load rating (C0) | 15,4 kN        |