


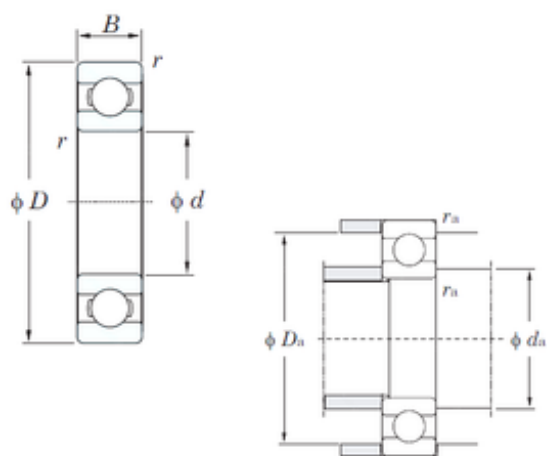

Bearing No. 16002

D	32 mm
d	15 mm
B	8 mm
C	8 mm
f0	13.9
Cu	0.150
Cr	7.00
C0r	2.85
Bore	0.591 Inch 15 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,025 Kg
r(min)	0.3
r min.	0,3 mm
da min.	17 mm
ra(max)	0.3
Da max.	30 mm
Da(max)	30
da(min)	17
ra max.	0,3 mm
Category	Single Row Ball Bearing
Oil lub.	28000
Inventory	0.0
Enclosure	Open
Size (mm)	15x32x8
Snap Ring	No
Width (mm)	8
Grease lub.	23000
Bearing No.	16002

Weight / LBS	0.05511
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	16002
Other Features	Deep Groove
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
(Refer.)Mass(kg)	0.025
Manufacturer URL	http://www.koyousa.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.315 Inch 8 Millimeter
Long Description	15MM Bore; 32MM Outside Diameter; 8MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	1.26 Inch 32 Millimeter
Manufacturer Name	KOYO
Weight / Kilogram	0
Internal Clearance	C0-Medium
Bore Diameter (mm)	15
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	28000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	23000 r/min

Basic static load rating (C0)	2,85 kN
Basic dynamic load rating (C)	5,6 kN
Maximum Capacity / Filling Slot	No