


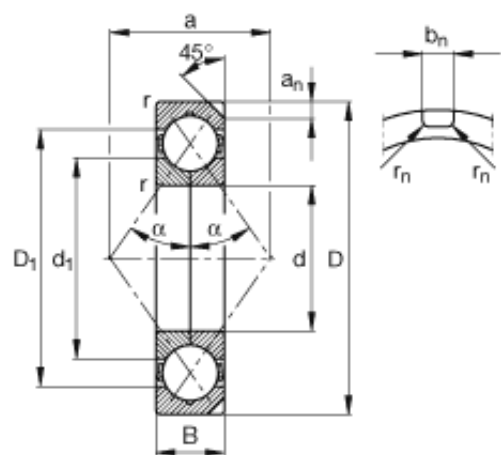

Bearing No. QJ330-N2-MPA

|                     |                                         |
|---------------------|-----------------------------------------|
|                     | 45 ° / Groove angle                     |
| D                   | 320 mm                                  |
| m                   | 28 kg / Weight                          |
| a                   | 165 mm                                  |
| B                   | 65 mm                                   |
| d                   | 150 mm                                  |
| ?                   | 35 ° / Angle                            |
| Size (mm)           | 150x320x65                              |
| Width (mm)          | 65                                      |
| r <sub>n</sub>      | 2 mm                                    |
| a <sub>n</sub>      | 12,7 mm                                 |
| b <sub>n</sub>      | 10,5 mm                                 |
| C <sub>r</sub>      | 510000 N / Dynamic load rating (radial) |
| d <sub>1</sub>      | 211,3 mm                                |
| n <sub>G</sub>      | 3650 1/min / Limiting speed             |
| D <sub>1</sub>      | 261 mm                                  |
| C <sub>0r</sub>     | 730000 N / Static load rating (radial)  |
| Bearing number      | QJ330-N2-MPA                            |
| C <sub>ur</sub>     | 25500 N                                 |
| r <sub>min</sub>    | 4 mm                                    |
| r <sub>a max</sub>  | 3 mm                                    |
| d <sub>a min</sub>  | 167 mm                                  |
| D <sub>a max</sub>  | 303 mm                                  |
| Bore Diameter (mm)  | 150                                     |
| Outer Diameter (mm) | 320                                     |