


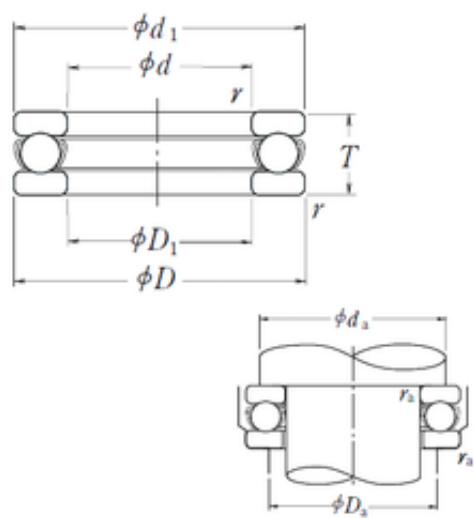

Bearing No. 51306

r	1
C	43
d	30 mm
D	60 mm
T	21 mm
C0	78.5
Z_	12
B_	21
da	48
D1	32 mm
ra	1
D_	60
d1	60 mm
T_	21
DA_	10.319
D_1	32
SRI	5.6
D_a	42
SRE	5.6
SREX	0.05
KBRG	5111
mass	0.267
SRIX	0.05
SRIN	0
SREN	0
yobi	51306
SDM_	45
Noun	Bearing
UNSPSC	31171552
LangID	1

Bore 2	1.26 Inch 32 Millimeter
Height	0.827 Inch 21 Millimeter
Bore 1	1.181 Inch 30 Millimeter
Banded	No
r min.	1 mm
Weight	0,267 Kg
hidYobi	51306
GRS rpm	2800
da min.	48 mm
Da max.	42 mm
ra max.	1 mm
series:	513
Oil rpm	4300
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	2.0
Size (mm)	30x60x21
race type:	Flat
Width (mm)	21
Prod_Type3	TB_SD_WFS
maximum rpm:	4300 RPM
Weight / LBS	0.58863
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
cage material:	Steel
overall width:	21 mm
Other Features	Single Row With Flat Seat
Keyword String	Ball Thrust
Thrust Bearing	Yes

bore diameter:	30 mm
Bearing number	51306
fillet radius:	1 mm
Precision Class	Non-Precision
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.362 Inch 60 Millimeter
Long Description	30MM Bore 1; 32MM Bore 2; 60MM Outside Diameter; 21MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
outside diameter:	60 mm
Weight / Kilogram	0.27
Manufacturer Name	NSK
precision rating:	ABEC 1 (ISO Class Normal)
Bore Diameter (mm)	30
Outer Diameter (mm)	60
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
Component Description	Roller Assembly Plus Raceways
static load capacity:	8000 kg
Harmonized Tariff Code	8482.10.50.08
dynamic load capacity:	4400 kg
Manufacturer Item Number	51306
outside diameter design:	Straight
Single or Double Direction	Single Direction

(Grease) Lubrication Speed	2800 r/min
operating temperature range:	Maximum of +120 °C
Basic static load rating (C0)	78,5 kN
Basic dynamic load rating (C)	43 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter