Loyal | 51306

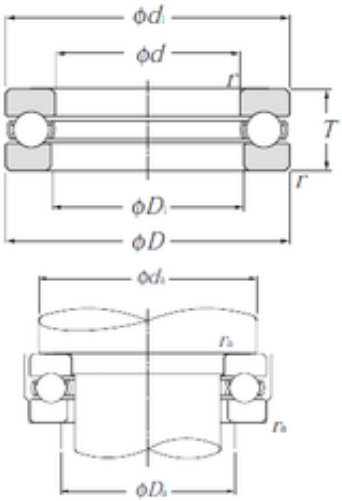

Bearing No. 51306

D	60 mm
d	30 mm
T	21 mm
d1	60 mm
D1	32 mm
Noun	Bearing
Bore 1	1.181 Inch | 30 Millimeter
Weight	0,269 Kg
Bore 2	1.26 Inch | 32 Millimeter
UNSPSC	31171552
Banded	No
r min.	1 mm
Height	0.827 Inch | 21 Millimeter
da min.	48 mm
ra max.	1 mm
Da max.	42 mm
series:	513
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	30x60x21
Width (mm)	21
Weight / LBS	0.59304
maximum rpm:	3900 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	30 mm
overall width:	21 mm
Keyword String	Ball Thrust

cage material:	Resin
fillet radius:	1 mm
Bearing number	51306
Other Features	Single Row | With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 | ISO P0
Outside Diameter	2.362 Inch | 60 Millimeter
Long Description	30MM Bore 1; 32MM Bore 2; 60MM Outside Diameter; 21MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 | ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
precision rating:	ISO Class 0
Weight / Kilogram	0.259
Manufacturer Name	NTN
outside diameter:	60 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	30
Outer Diameter (mm)	60
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
static load capacity:	78500 N
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	43000 N
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item	51306

Number	
outside diameter design:	Straight
(Grease) Lubrication Speed	2 800 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 ºC
Basic static load rating (C0)	78,5 kN
Basic dynamic load rating (C)	43 kN
Overall Height with Aligning Washer	0 Inch | 0 Millimeter