


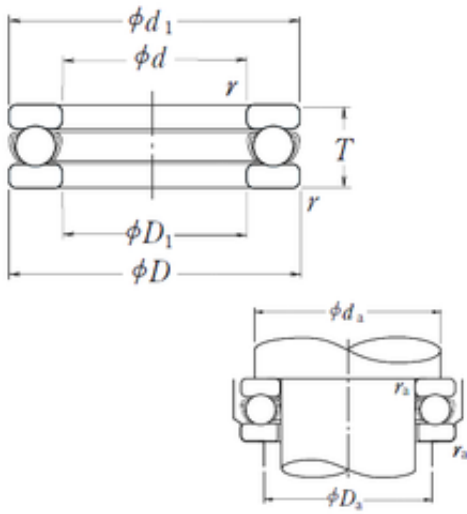

Bearing No. 51308

r	1
C	70
d	40 mm
D	78 mm
T	26 mm
C0	135
Z_	12
B_	26
da	63
D1	42 mm
ra	1
D_	78
d1	78 mm
T_	26
DA_	13.494
D_1	42
SRI	7.25
D_a	55
SRE	7.25
SREX	0.05
KBRG	5111
mass	0.536
SRIX	0.05
SRIN	0
SREN	0
yobi	51308
SDM_	59
Noun	Bearing
UNSPSC	31171552
LangID	1

Bore 2	1.654 Inch 42 Millimeter
Height	1.024 Inch 26 Millimeter
Bore 1	1.575 Inch 40 Millimeter
Banded	No
r min.	1 mm
Weight	0,536 Kg
hidYobi	51308
GRS rpm	2200
da min.	63 mm
Da max.	55 mm
ra max.	1 mm
series:	51300
Oil rpm	3400
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	40x78x26
race type:	Flat
Width (mm)	26
Prod_Type3	TB_SD_WFS
maximum rpm:	3400 rpm
Weight / LBS	1.18168
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
cage material:	Steel Cage
overall width:	26 mm
Other Features	Single Row With Flat Seat
Keyword String	Ball Thrust

Thrust Bearing	Yes
bore diameter:	40 mm
Bearing number	51308
fillet radius:	1 mm
Precision Class	Non-Precision
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.071 Inch 78 Millimeter
Long Description	40MM Bore 1; 42MM Bore 2; 78MM Outside Diameter; 26MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
outside diameter:	78 mm
Manufacturer Name	NSK
Weight / Kilogram	0.55
precision rating:	ABEC1, P0
Bore Diameter (mm)	40
Outer Diameter (mm)	78
separable or banded:	Separable
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
static load capacity:	30000 lbf
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	15700 lbf
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	51308
outside diameter design:	Straight
(Grease) Lubrication Speed	2200 r/min

Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	70 kN
Basic static load rating (C0)	135 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter