


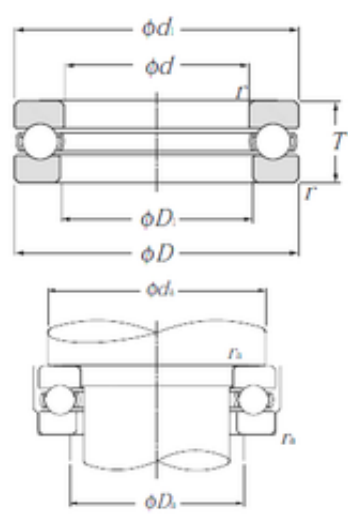

Bearing No. 51308

D	78 mm
d	40 mm
T	26 mm
d1	78 mm
D1	42 mm
Noun	Bearing
Bore 1	1.575 Inch 40 Millimeter
Weight	0,548 Kg
Height	1.024 Inch 26 Millimeter
UNSPSC	31171552
Banded	No
r min.	1 mm
Bore 2	1.654 Inch 42 Millimeter
da min.	63 mm
ra max.	1 mm
Da max.	55 mm
series:	513
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	40x78x26
Width (mm)	26
Weight / LBS	1.20813
maximum rpm:	3100 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	40 mm
overall width:	26 mm

Keyword String	Ball Thrust
cage material:	Steel
fillet radius:	1 mm
Bearing number	51308
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	3.071 Inch 78 Millimeter
Long Description	40MM Bore 1; 42MM Bore 2; 78MM Outside Diameter; 26MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
precision rating:	ISO Class 0
Weight / Kilogram	0.546
Manufacturer Name	NTN
outside diameter:	78 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	40
Outer Diameter (mm)	78
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
static load capacity:	135000 N
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	69000 N
Harmonized Tariff Code	8482.10.50.08

Manufacturer Item Number	51308
outside diameter design:	Straight
(Grease) Lubrication Speed	2 200 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	135 kN
Basic dynamic load rating (C)	69 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter