


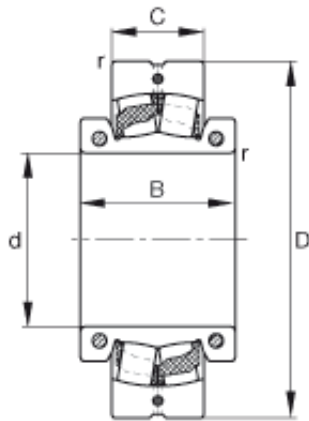

Bearing No. 222S.400

	H322.400
e	0,24
C	53 mm
m	9,93 kg / Weight
B	92 mm
d	4 inch
D	200 mm
SNV200	Designation, plummer block housing
SNW22.400	Designation, adapter sleeve, US design
Size (mm)	101.6x200x53
Width (mm)	53
n_G	1590 1/min / Limiting speed
M_a	14 Nm / Tightening torque per clamping screw
M_i	35 Nm / Tightening torque per clamping screw
Y_0	2,78
Y_2	4,23
Y_1	2,84
C_r	360000 N / Dynamic load rating (radial)
C_{0r}	465000 N / Static load rating (radial)
C_{ur}	39500 N / Fatigue limit load, radial
Bearing number	222S.400
r_{min}	2,1 mm

$F_{a\ max}$	13800 N / Permissible axial load, for inner ring without axial abutment
Bore Diameter (mm)	101,6
Outer Diameter (mm)	200