


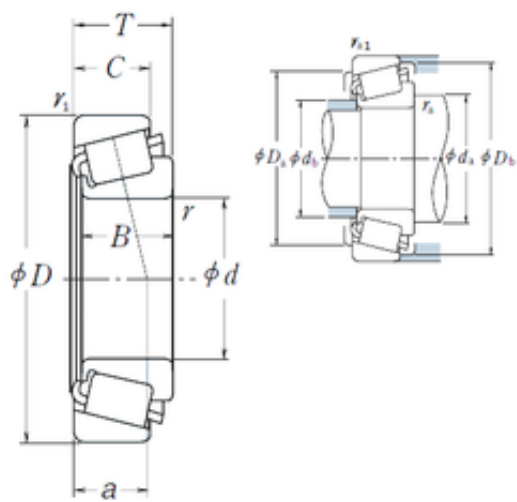

Bearing No. LM613449/LM613410

e	0.42
d	69,85 mm
D	112,712 mm
T	22,225 mm
B	21,996 mm
C	15,875 mm
a	22,1 mm
Da	104 mm
B_	21.996
Db	107 mm
da	78 mm
Y0	0.79
db	76 mm
C0	113
D_	112.712
Z_	22
C_	15.875
Y1	1.4
DE_	101.928
SLR	14.2
D_a	104
DI_	81.52
DA1	10.871
DA2	10.09
CUP	0.238
DA_	10.483
D_b	107
RAr	196.722
SDM_	91.747
KBRG	3161

yobi	LM613449/LM613410
CONE	0.562
ALP21	31
ALP22	10
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	1,5 mm
LangID	1
Weight	0,8 Kg
ALPHA_	15.583
r1 min.	0,8 mm
ra max.	1,5 mm
Oil rpm	4000
outer r	0.8
hidYobi	LM613449/LM613410
GRS rpm	3000
inner r	1.5
hidTable	ecat_NSTPRI
inner ra	1.5
outer rb	0.8
ra1 max.	0,8 mm
Size (mm)	69.85x112.712x22.225
SHOG_yobi	LM613449R/LM613410 R
Prod_Type3	TRBSR_ID_A
Width (mm)	22,225
Bearing number	LM613449/LM613410
Bore Diameter (mm)	69,85
Outer Diameter (mm)	112,712
Calculation factor (e)	0,42

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,79
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	113 kN
Basic dynamic load rating (C)	85 kN