


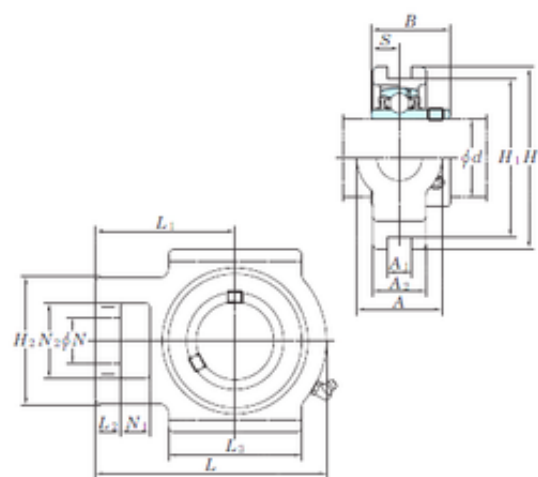

Bearing No. UCT210-30E

|                               |            |
|-------------------------------|------------|
| H                             | 117 mm     |
| L                             | 149 mm     |
| d                             | 47,625 mm  |
| S                             | 19 mm      |
| A                             | 49 mm      |
| N                             | 29 mm      |
| B                             | 51,6 mm    |
| N1                            | 19 mm      |
| L1                            | 90 mm      |
| H2                            | 83 mm      |
| H1                            | 101,6 mm   |
| N2                            | 49 mm      |
| A1                            | 17,5 mm    |
| L3                            | 86 mm      |
| L2                            | 16 mm      |
| A2                            | 37 mm      |
| Weight                        | 2,6 Kg     |
| Bearing number                | UCT210-30E |
| Bore Diameter (mm)            | 47,625     |
| Basic dynamic load rating (C) | 35,1 kN    |
| Basic static load rating (C0) | 23,3 kN    |