


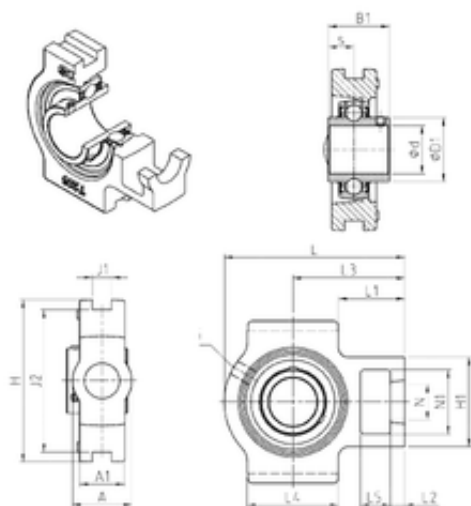

Bearing No. UCT210

C	35.1 kN
A	49 mm
S	19 mm
G	M6x1
B	51.6 mm
L	149 mm
H	117 mm
N	29 mm
s	19 mm
d	50 mm
A1	37 mm
SW	5 mm
s1	25.8 mm
N2	49 mm
H2	83 mm
L4	86 mm
A5	32.6 mm
L5	19 mm
A2	37 mm
J2	102 mm
N1	49 mm
C0	23.2 kN
L1	47 mm
L2	16 mm
H1	83 mm
L3	90 mm
D1	61,8 mm
B1	51,6 mm
J1	16 mm
T max.	100 °C

Weight	2,5 Kg
T min.	-20 °C
Thread (G)	M6x1
Bearing number	UCT210
Bore Diameter (mm)	50
Designation of housing	T210-
Designation of bearing	UC210G2
Basic dynamic load rating (C)	35,1 kN
Recommended tightening torque for set screw	22 Nm