


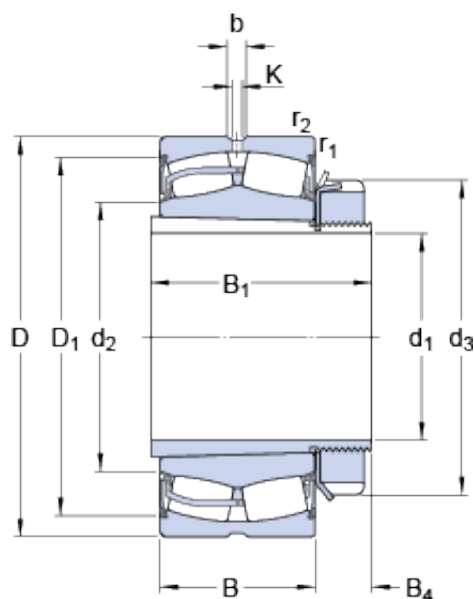

Bearing No. 22228-2CS5K/VT143 + H 3128 L

K	6 mm
b	11.1 mm
D	250 mm
B	68 mm
Size (mm)	250x125x68
Width (mm)	68
d ₁	125 mm
B ₁	97 mm
d ₃	165 mm
B ₄	24 mm
d ₂	161 mm
D ₁	225 mm
d ₃	165 mm
d ₁	125 mm
B ₁	97 mm
B ₄	24 mm
Bearing number	22228-2CS5K/VT143 + H 3128 L
Limiting speed	670 r/min
Bore Diameter (mm)	250
r _a max.	2.5 mm
B _a min.	8 mm
D _a max.	236 mm
d _b min.	149 mm
d _a max.	161 mm
Outer Diameter (mm)	125
Calculation factor e	0.24
r _{1,2} min.	3 mm
B _a - min.	8 mm

D_a - max.	236 mm
r_a - max.	2.5 mm
d_b - min.	149 mm
d_a - max.	161 mm
d_2 ?	161 mm
Mass bearing + sleeve	17.6 kg
D_1 ?	225 mm
Calculation factor - e	0.24
$r_{1,2}$ - min.	3 mm
Basic dynamic load rating C	744 kN
Basic dynamic load rating - C	744 kN
Fatigue load limit P_u	86.5 kN
Calculation factor Y_1	2.8
Calculation factor Y_2	4.2
Calculation factor Y_0	2.8
Calculation factor - Y_1	2.8
Calculation factor - Y_2	4.2
Fatigue load limit - P_u	86.5 kN
Basic static load rating C_0	900 kN
Basic static load rating - C_0	900 kN