


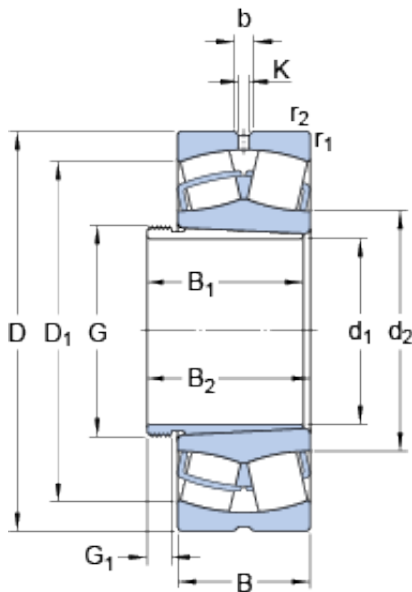

Bearing No. 22328 CCK/W33 + AHX 2328 G

D	300 mm
B	102 mm
b	16.7 mm
K	9 mm
G	M 150x2
Size (mm)	300x135x102
Width (mm)	102
d ₂	175 mm
G ₁	150 mm
G ₁	20 mm
B ₁	125 mm
d ₁	135 mm
D ₁	247 mm
B ₁	125 mm
d ₁	135 mm
Bearing number	22328 CCK/W33 + AHX 2328 G
Limiting speed	2200 r/min
Reference speed	1700 r/min
D _a max.	283 mm
r _a max.	3 mm
d _a min.	149 mm
Bore Diameter (mm)	300
Outer Diameter (mm)	135
r _a - max.	3 mm
Calculation factor e	0.35
D _a - max.	283 mm
d _a - min.	149 mm
r _{1,2} min.	4 mm
	130 mm

B ² ?	
------------------	--

D_1 ?	247 mm
d_2 ?	175 mm
Mass bearing + sleeve	38 kg
$r_{1,2}$ - min.	4 mm
Calculation factor - e	0.35
Basic dynamic load rating C	1357 kN
Basic dynamic load rating - C	1357 kN
Fatigue load limit P_u	132 kN
Calculation factor Y_1	1.9
Calculation factor Y_2	2.9
Calculation factor Y_0	1.8
Calculation factor - Y_2	2.9
Calculation factor - Y_1	1.9
Fatigue load limit - P_u	132 kN
Basic static load rating C_0	1560 kN
Basic static load rating - C_0	1560 kN