


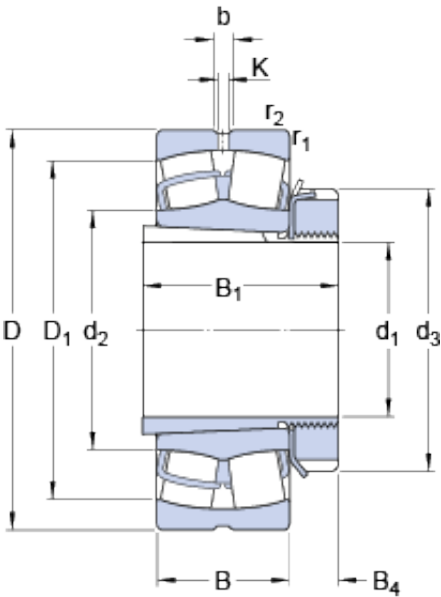

Bearing No. 23038 CCK/W33 + H 3038

D	290 mm
B	75 mm
b	13.9 mm
K	7.5 mm
Size (mm)	290x170x75
Width (mm)	75
d ₃	220 mm
d ₁	170 mm
B ₄	30.5 mm
B ₁	112 mm
d ₁	170 mm
d ₂	216 mm
D ₁	261 mm
B ₁	112 mm
B ₄	30.5 mm
d ₃	220 mm
Bearing number	23038 CCK/W33 + H 3038
Limiting speed	2400 r/min
Reference speed	1900 r/min
Bore Diameter (mm)	290
r _a max.	2 mm
B _a min.	10 mm
D _a max.	279 mm
d _b min.	199 mm
d _a max.	216 mm
Outer Diameter (mm)	170
Calculation factor e	0.23
r _{1,2} min.	2.1 mm

r_a - max.	2 mm
B_a - min.	10 mm
D_a - max.	279 mm
d_b - min.	199 mm
d_a - max.	216 mm
d_2 ?	216 mm
Mass bearing + sleeve	24.8 kg
D_1 ?	261 mm
Calculation factor - e	0.23
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	916 kN
Basic dynamic load rating - C	916 kN
Fatigue load limit P_u	122 kN
Calculation factor Y_1	2.9
Calculation factor Y_2	4.4
Calculation factor Y_0	2.8
Calculation factor - Y_1	2.9
Calculation factor - Y_2	4.4
Fatigue load limit - P_u	122 kN
Basic static load rating C_0	1340 kN
Basic static load rating - C_0	1340 kN